

Sub-Field-of-View Radiative Transfer for the Advanced Technology Microwave Sounder

Thomas J. Kleespies

*NOAA/NESDIS/Joint Center for Satellite Data Assimilation
Camp Springs, MD 20746 USA*

Introduction

Radiative transfer with channels that 'see' the surface is problematic because of emissivity and skin temperature uncertainties. This is especially true of inhomogeneous backgrounds, including coastlines, large rivers, mountainous regions, and even regions of high ocean temperature gradients (e.g. north wall of Gulf Stream). A possible solution might be the ability to integrate high resolution databases within a given field-of-view, and perform multiple radiative transfer within the field of view, weighed and integrated according to the antenna beam power.

Methodology

The Advanced Technology Microwave Sounder (ATMS) antenna patterns were normalized by adding a (negative) maximum value of each pattern to all values. The best fit to the eye was achieved with a 7th order polynomial. The 99% power level inside the field of view (fov) is at -20 dB. This is approximately 15.6 deg wide for the low frequency channels. Compared with 5.2 deg for the nominal 50% power of the ATMS fov, this is three times larger. Figure 1 gives the nominal ATMS fovs for a single scan, where the shading indicated the antenna power. Figure 2 shows the same ATMS fovs taken out to the 99% power level.

The GTOPO30 Digital Elevation Model (DEM) from the United States Geodetic Survey was used for this study. This model has a 0.008333° resolution, which translates to 0.93km at the equator. A single fov in the Philippines was selected. The nominal 50%, 95% and 99% power levels are shown in Figure 3. Figure 4 shows the same fov with the DEM warped according to the power fraction. Table 1 gives an example of integrated brightness temperature difference when the land/sea fraction was integrated according to the power fraction. This used a nominal land brightness temperature was 280K and the nominal ocean brightness temperature was 210K. For this example even going from 95% to 99% power levels yields almost a 0.5K difference.

Summary

A method has been presented to integrate land/sea fraction with antenna power fraction within the ATMS fov. If such a method is used to perform radiative transfer over inhomogeneous terrain, care must be taken to include as much of the actual fov as can be afforded computationally, lest unacceptable errors occur from truncation of the antenna power function.

Acknowledgments

The views expressed in this publication are those of the author and do not necessarily represent an official position or policy of NOAA, the Department of Commerce, or the United States Government.

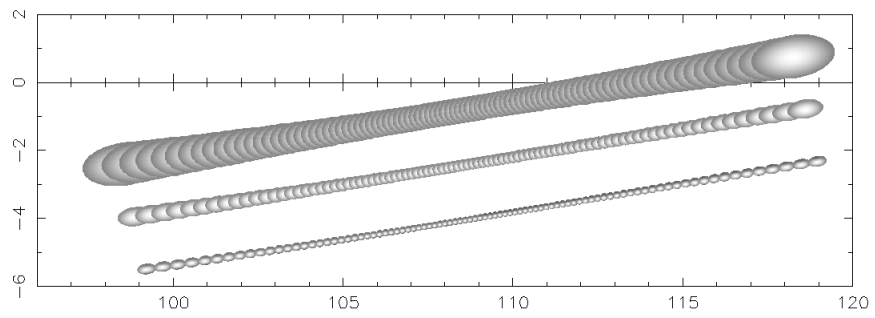


Figure 1. Nominal 50% power ATMS fovs. The gray scale indicates the relative power, with the center being 100% power and the edge being 50% power. Shown are the three resolutions of the ATMS. The coordinates are latitude and longitude.

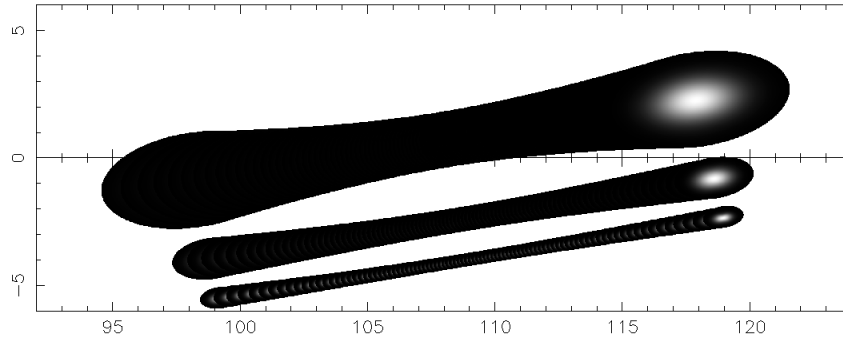


Figure 2. ATMS fovs at 99% power. The gray scale indicates the relative power, with the center being 100% power and the edge being 1% power. Shown are the three resolutions of the ATMS. The coordinates are latitude and longitude.

Table 1. Simulated brightness temperature computed from nominal land brightness temperature of 280 K and nominal ocean brightness temperature of 210 K for the 50%, 95% and 99 % fov sizes, weighted according to antenna power.

$$TB_{land} = 280 \quad TB_{sea} = 210$$

% Power	Land Fraction	Sea Fraction	Land Power Fraction	Sea Power Fraction	Tb
50%	0.476	0.524	0.491	0.509	244.39
95%	0.329	0.671	0.405	0.595	238.36
99%	0.269	0.731	0.397	0.603	237.80

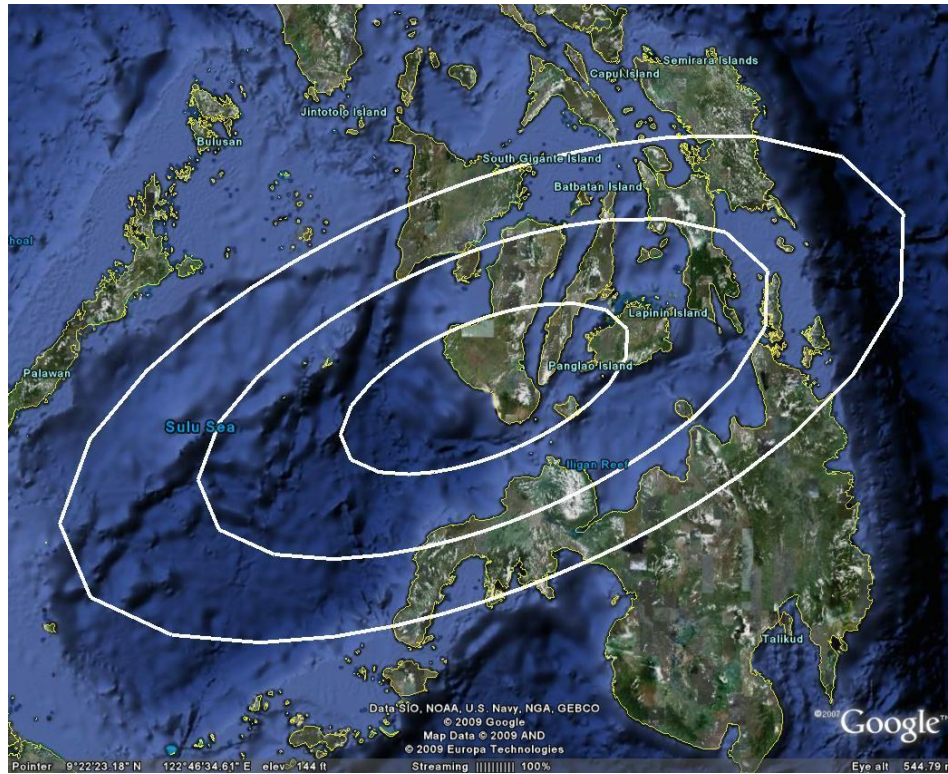


Figure 3. Nominal 50% power ATMS 5.2° fov (inner) with 95% and 99% power fov over the Philippines.

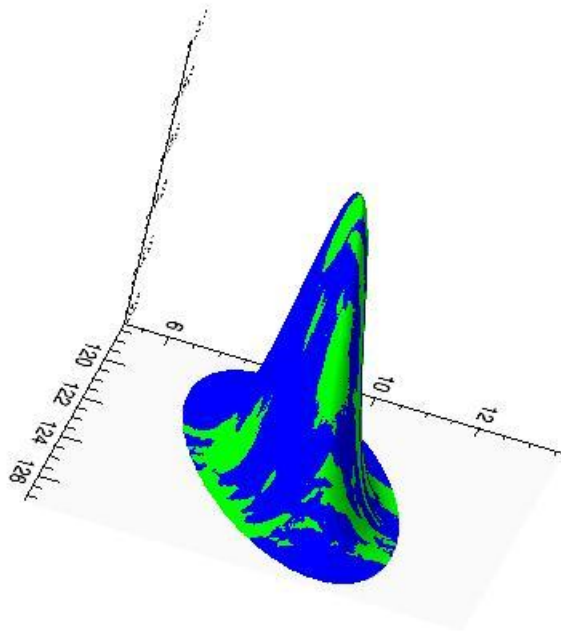


Figure 4. ATMS 5.2° fov at the 99% power level, with DEM warped over the relative antenna power.

International TOVS Study Conference, 17th, ITSC-17, Monterey, CA, 14-20 April 2010.
Madison, WI, University of Wisconsin-Madison, Space Science and Engineering Center,
Cooperative Institute for Meteorological Satellite Studies, 2011.