

Quick Review of Remote Sensing Basic Theory

Paolo Antonelli

CIMSS

University of Wisconsin-Madison

Benevento, June 2007




Outline


- Visible: RGB, Radiance and Reflectance
- Near Infrared: Absorption
- Infrared: Radiance and Brightness Temperature

Visible
(Reflective Bands)


Infrared
(Emissive Bands)

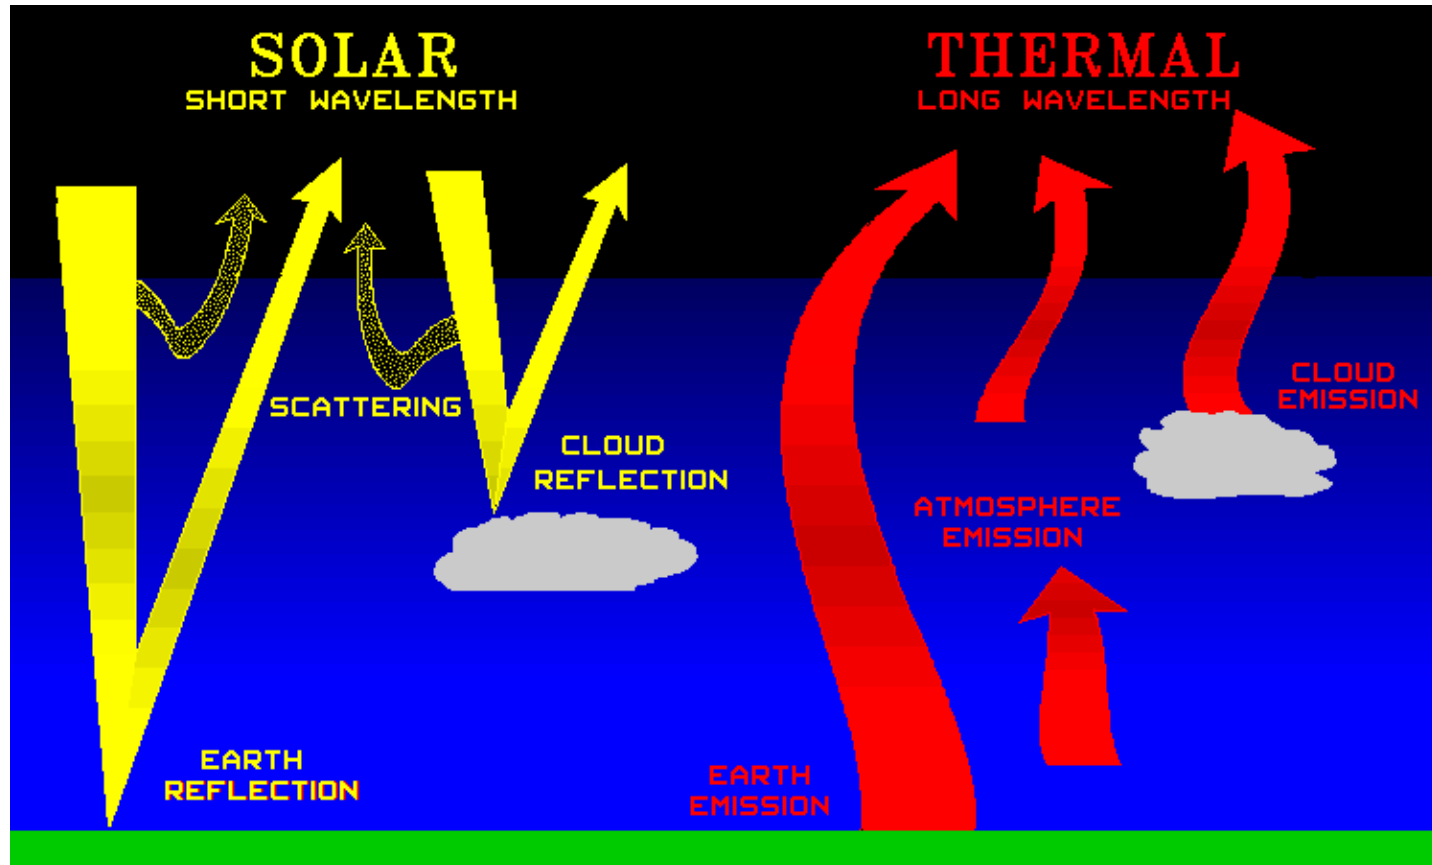

Sensor Geometry

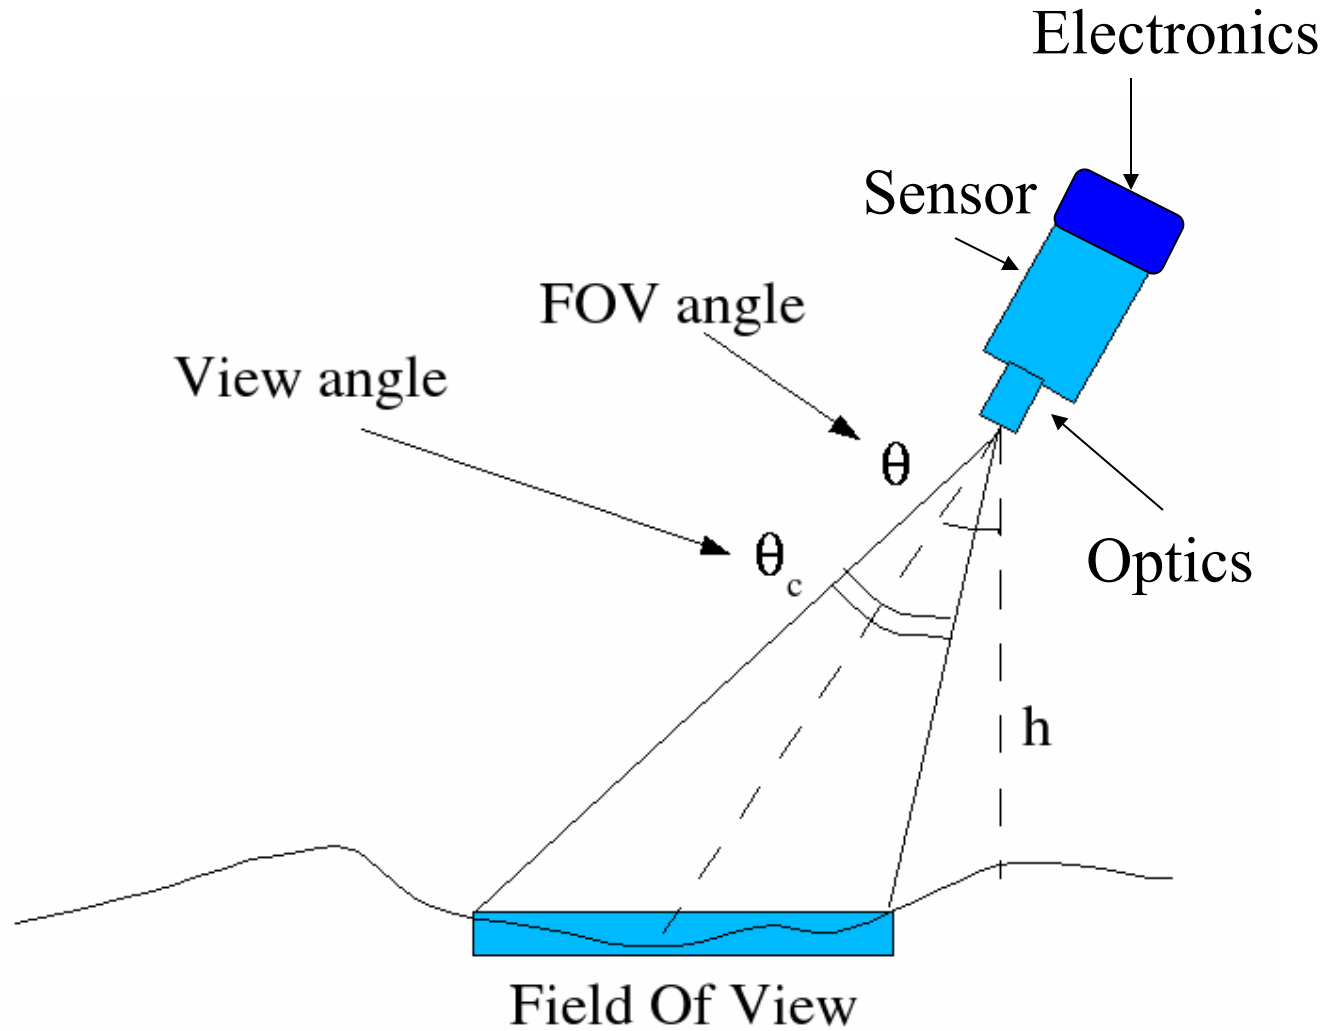

Terminology of radiant energy

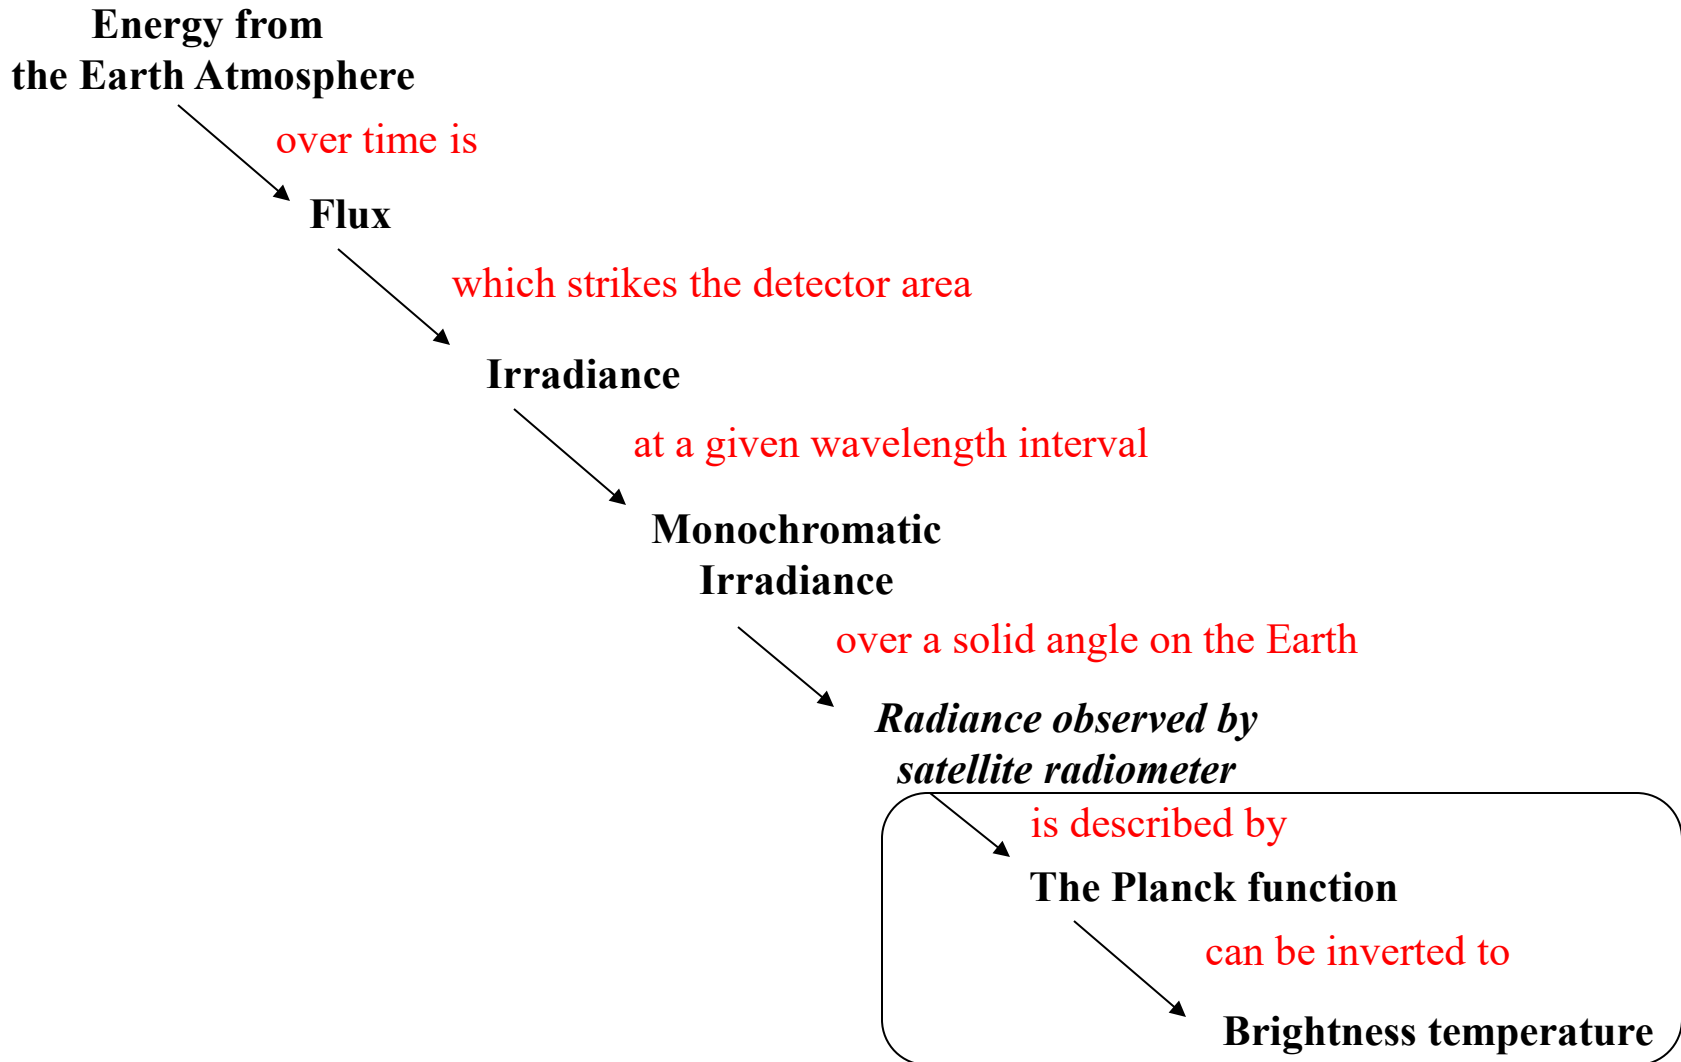

Definitions of Radiation

QUANTITY	SYMBOL	UNITS
Energy	dQ	Joules
Flux	dQ/dt	Joules/sec = Watts
Irradiance	$dQ/dt/dA$	Watts/meter ²
Monochromatic Irradiance	$dQ/dt/dA/d\lambda$ or $dQ/dt/dA/d\lambda$	W/m ² /micron W/m ² /cm ⁻¹
Radiance	$dQ/dt/dA/d\lambda/d\Omega$ or $dQ/dt/dA/d\lambda/d\Omega$	W/m ² /micron/ster W/m ² /cm ⁻¹ /ster

Visible: Reflective Bands


Used to observe solar energy reflected by the Earth system in the:


- Visible between .4 and .7 μm
- NIR between .7 and 3 μm

About 99% of the energy observed between 0 and 4 μm is solar reflected energy

Only 1% is observed above 4 μm


Electromagnetic Spectrum

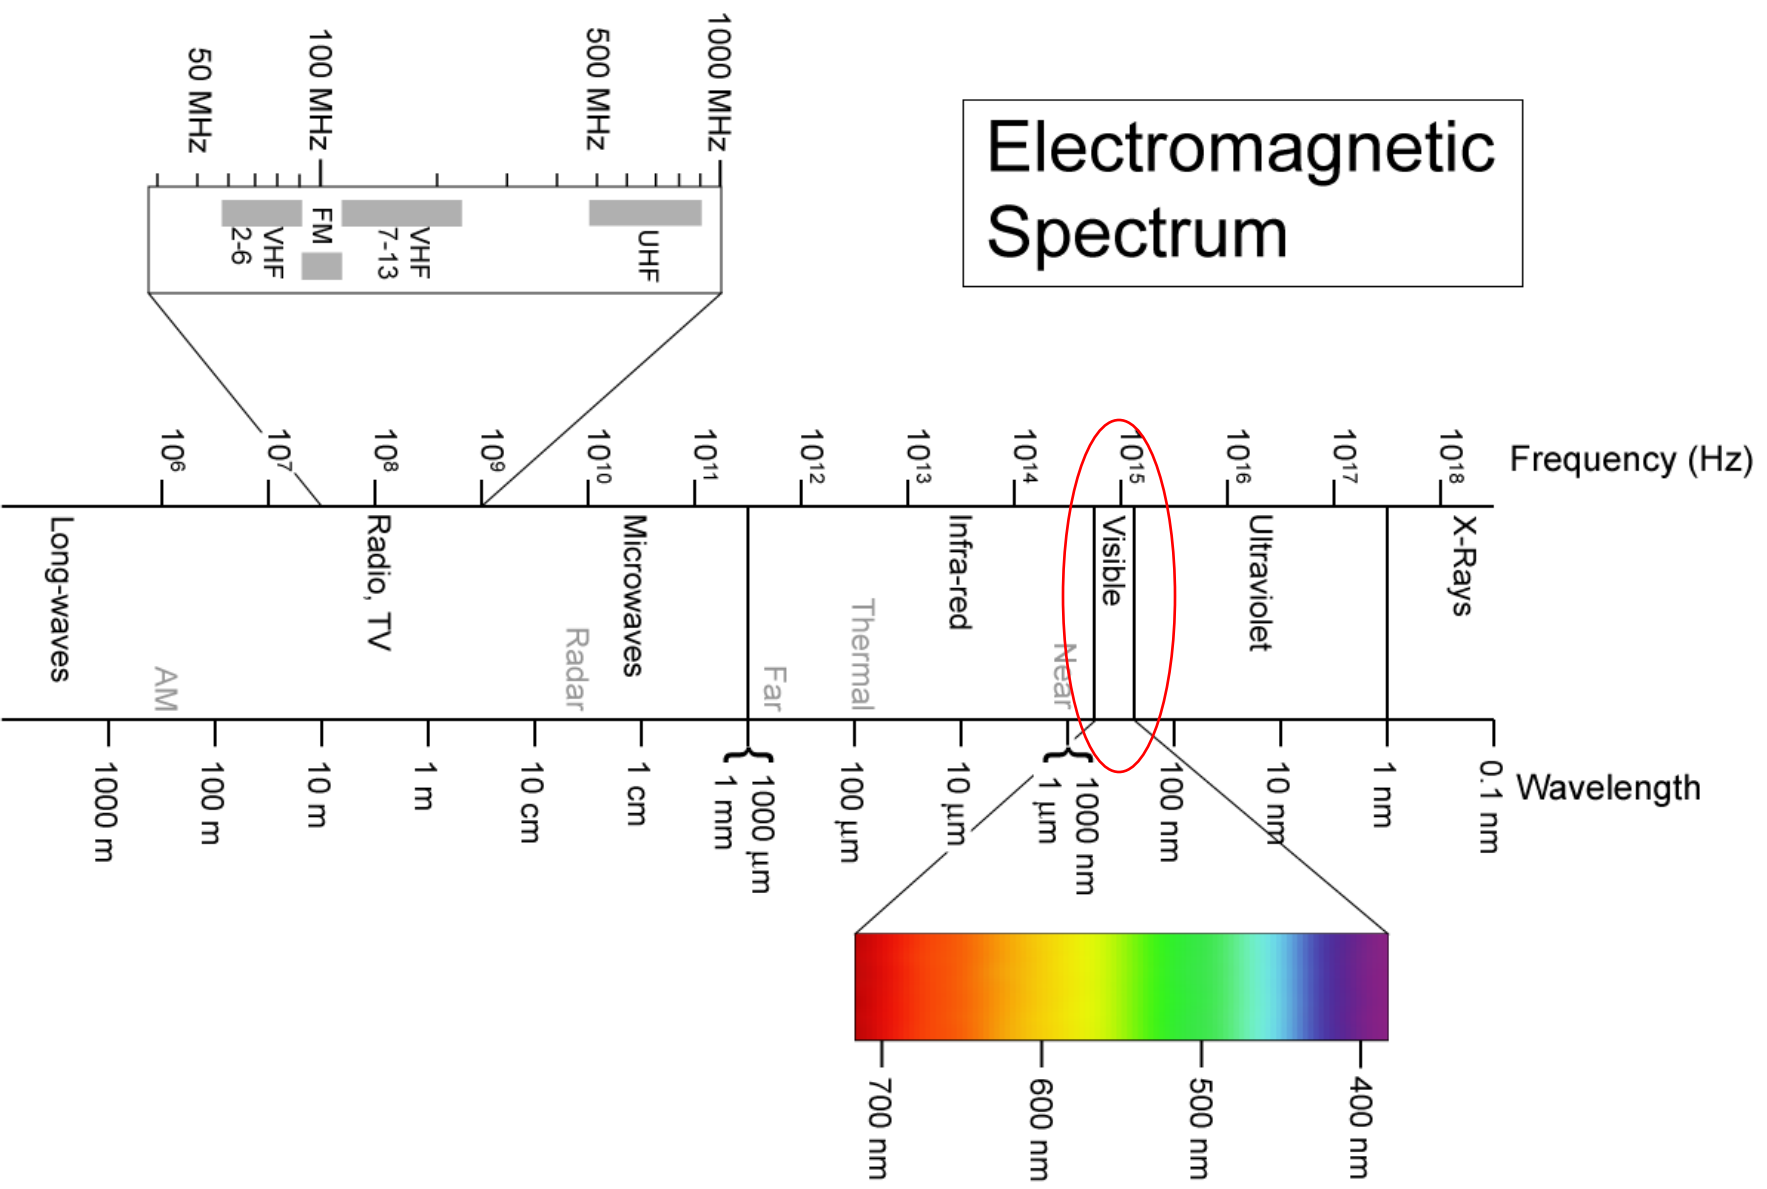

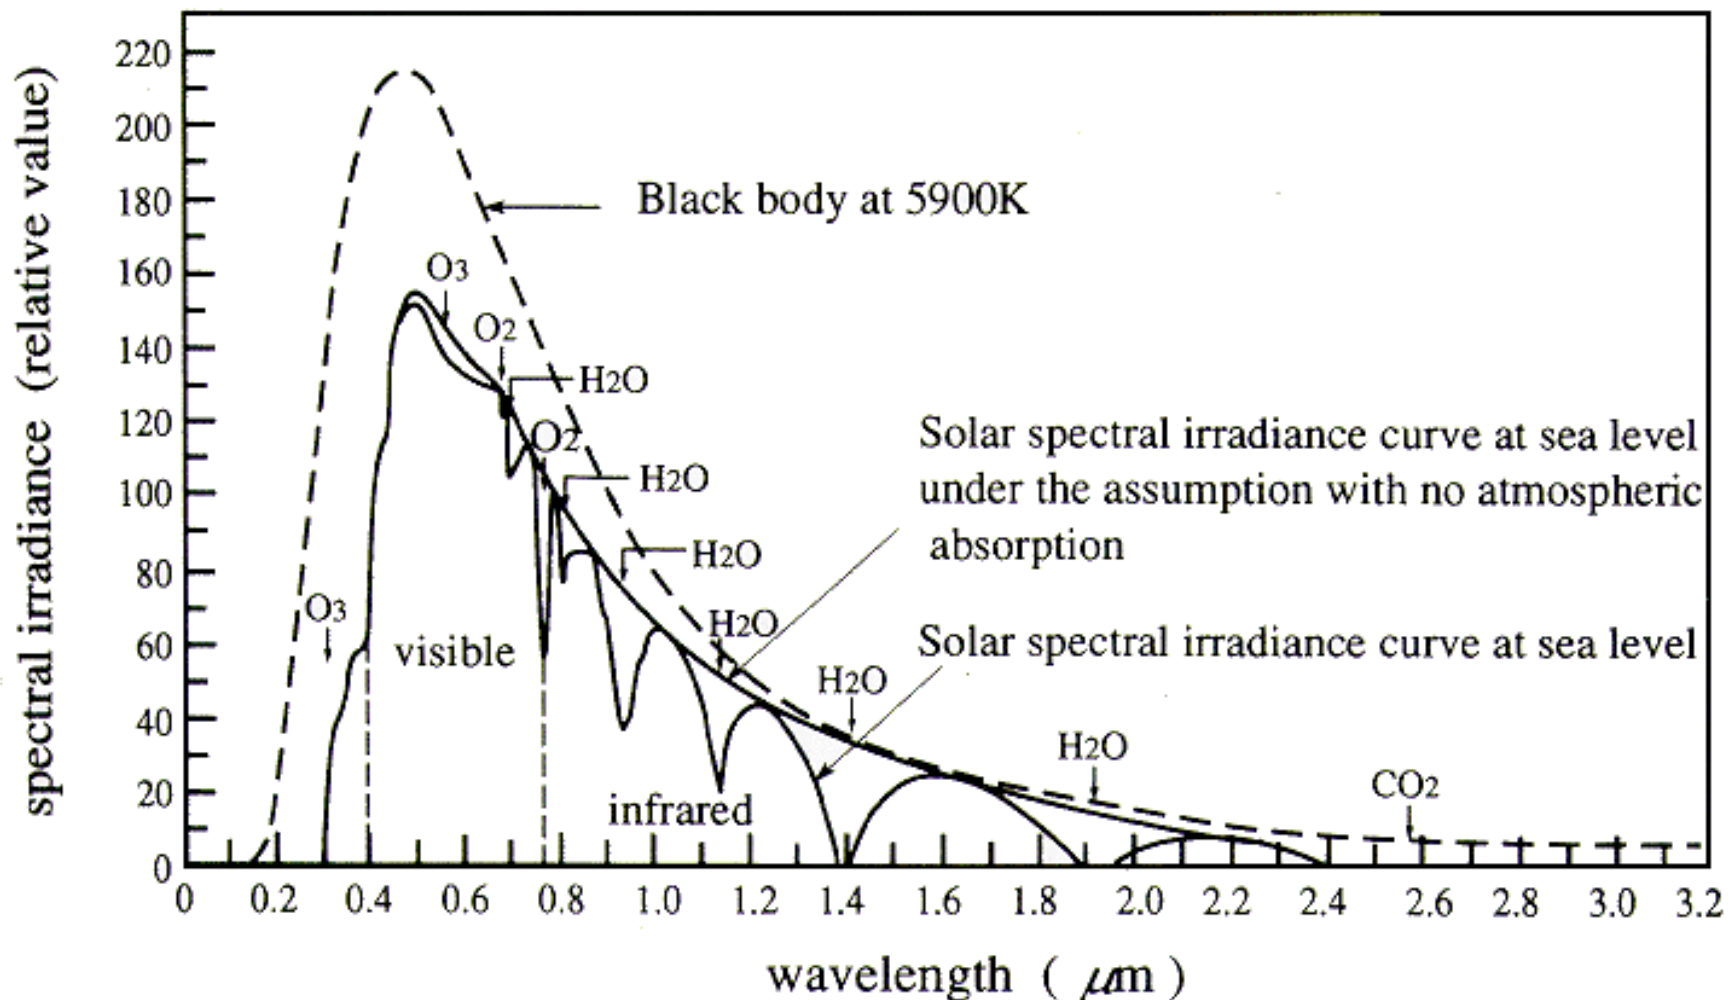

Comparison of spectral irradiance of solar light at sea level with black body radiation

Band: 1 wavelength 0.65 μm

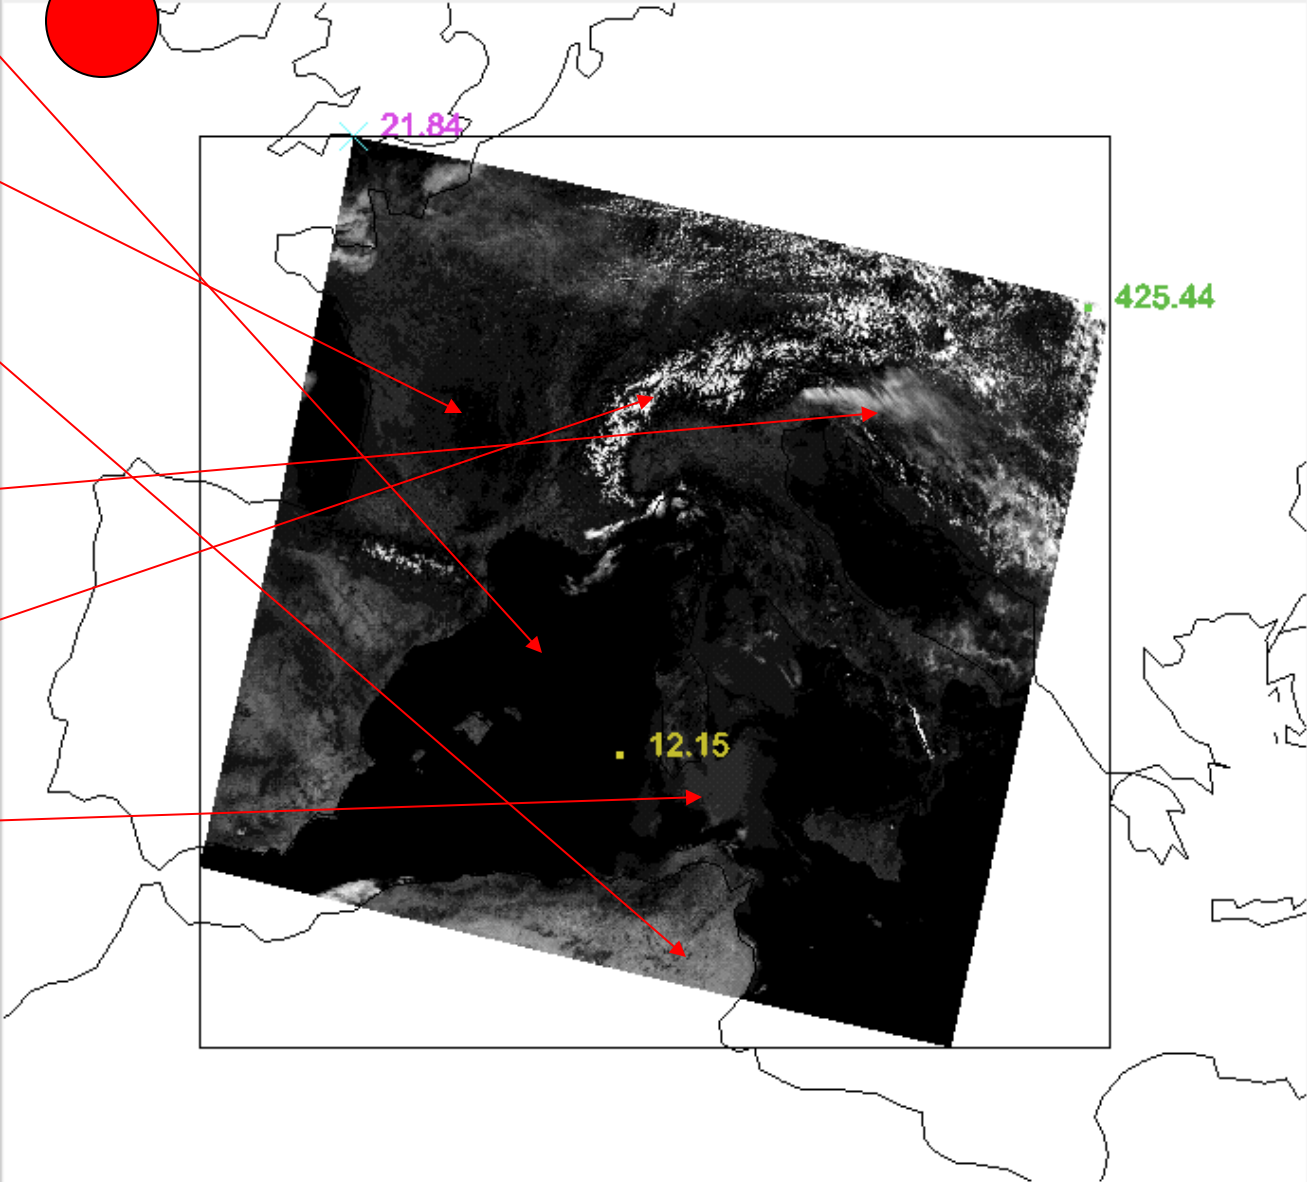

Ocean: Dark


Vegetated
Surface: Dark

NonVegetated
Surface: Brighter

Clouds: Bright

Snow: Bright

Sunglint



Band: 4 wavelength 0.56 μm



Ocean: Dark


Vegetated Surface: Dark

NonVegetated Surface: Brighter

Clouds: Bright

Snow: Bright


Sunglint

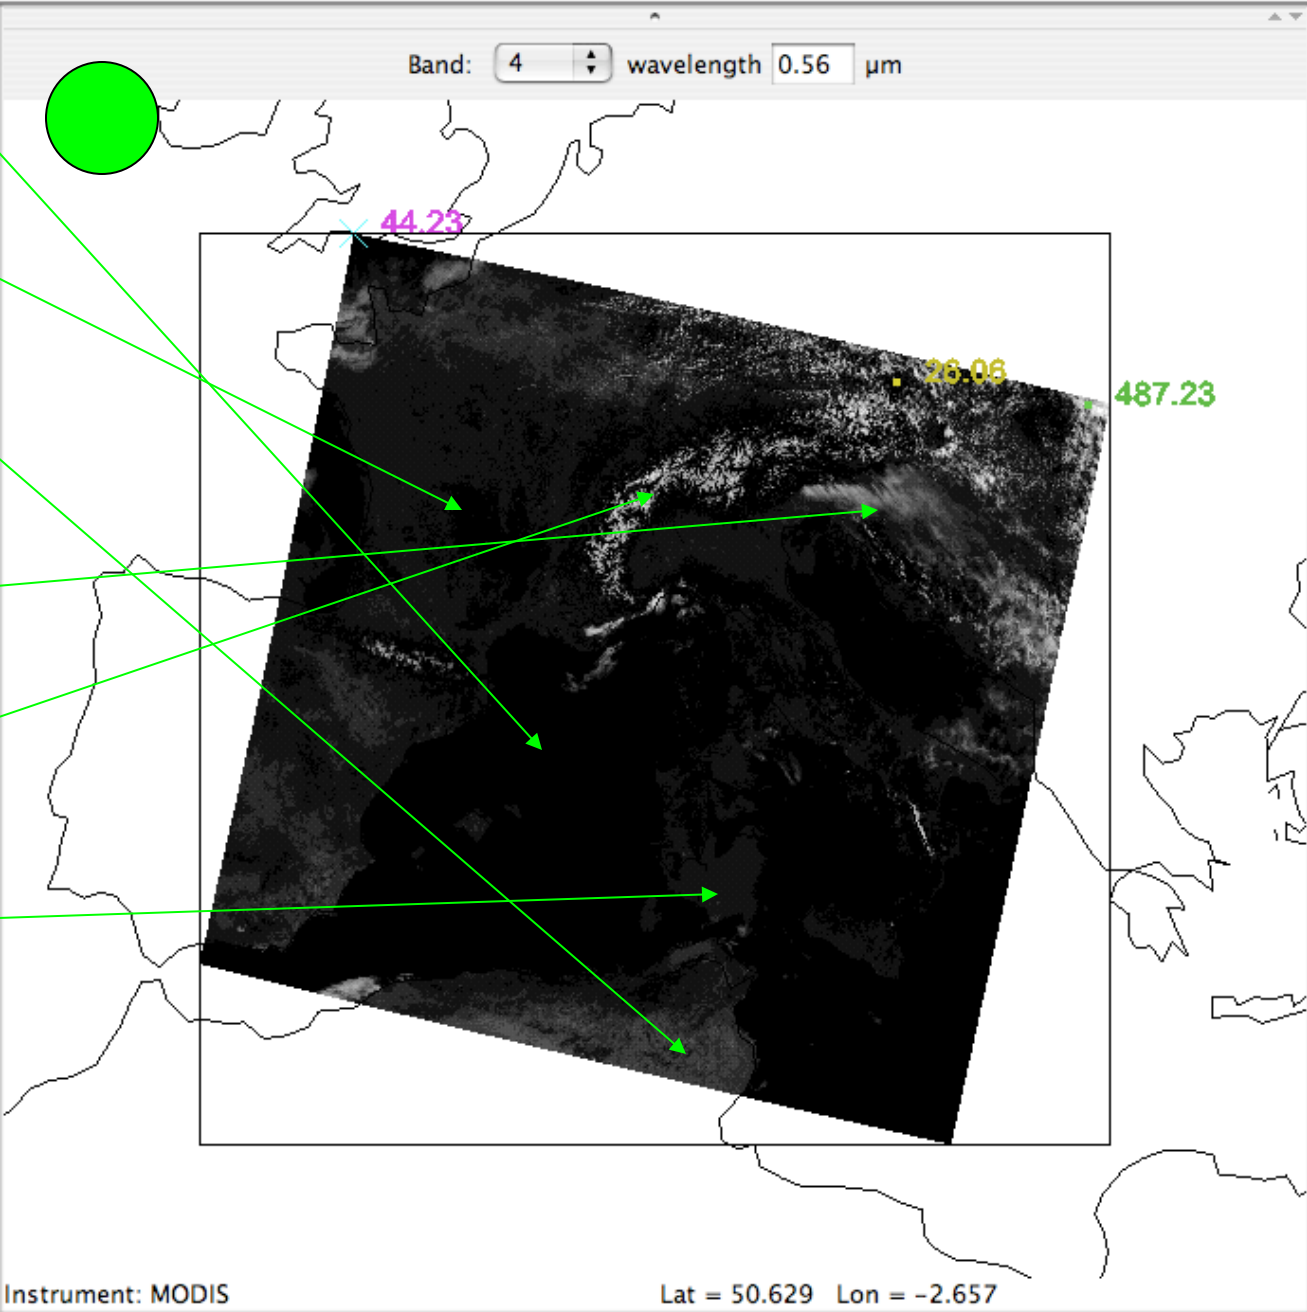


44.23

28.06


487.23



Band: 3 wavelength 0.47 μm




- Ocean: Dark
- Vegetated Surface: Dark
- NonVegetated Surface: Brighter
- Clouds: Bright
- Snow: Bright
- Sunglint

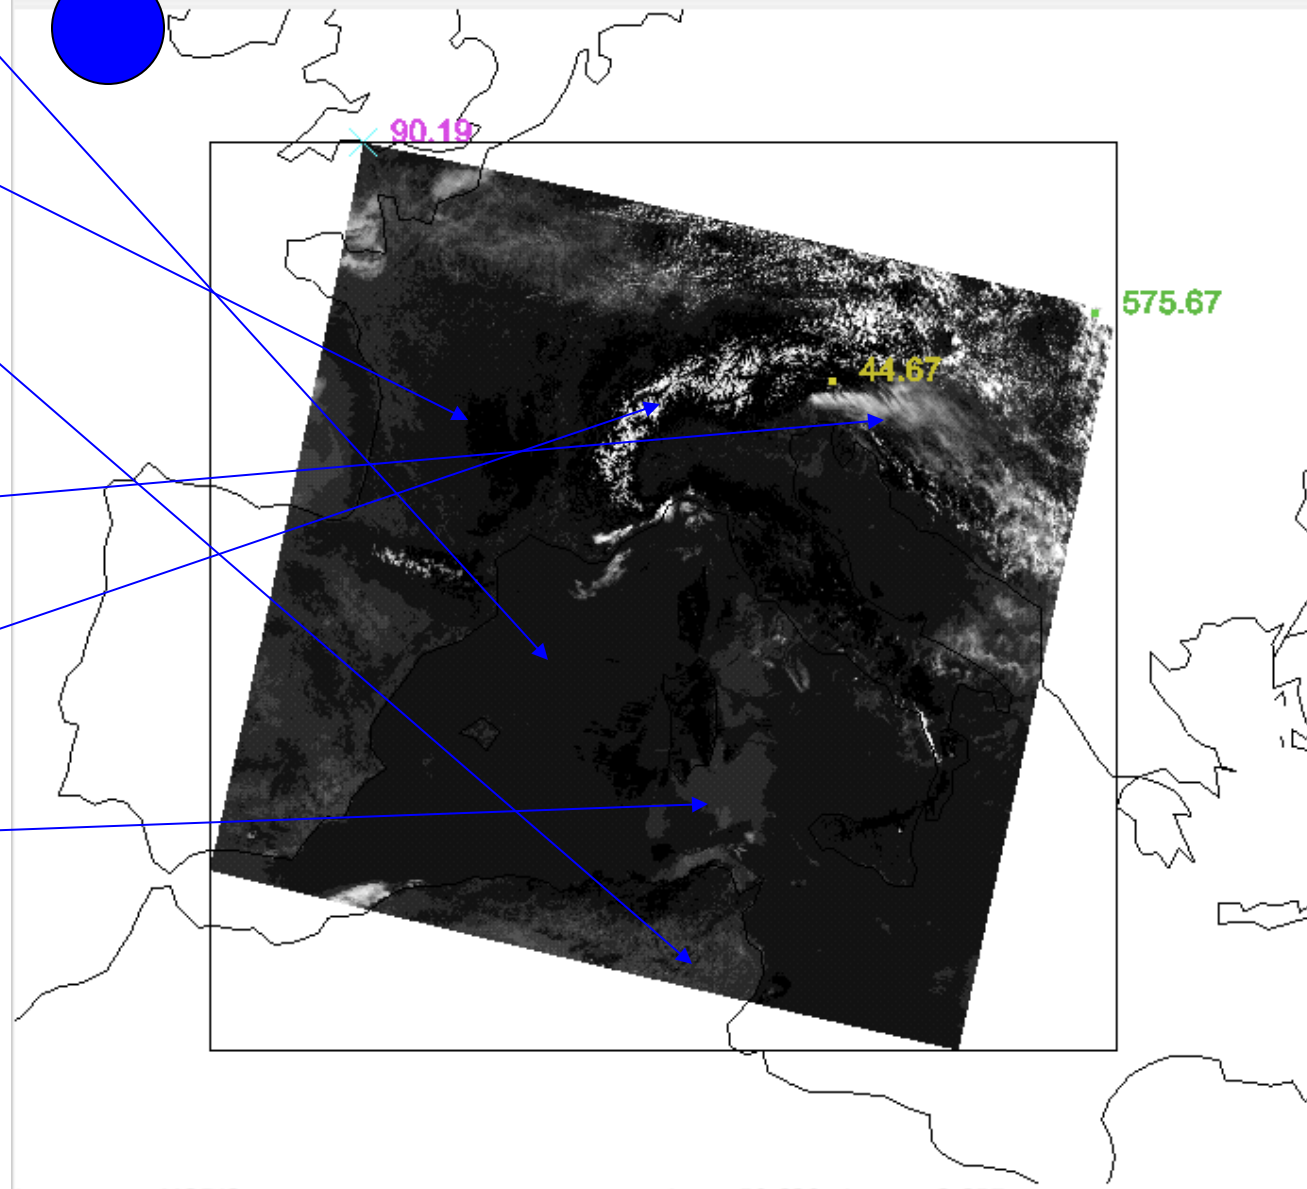

Instrument: MODIS

Lat = 50.629 Lon = -2.657



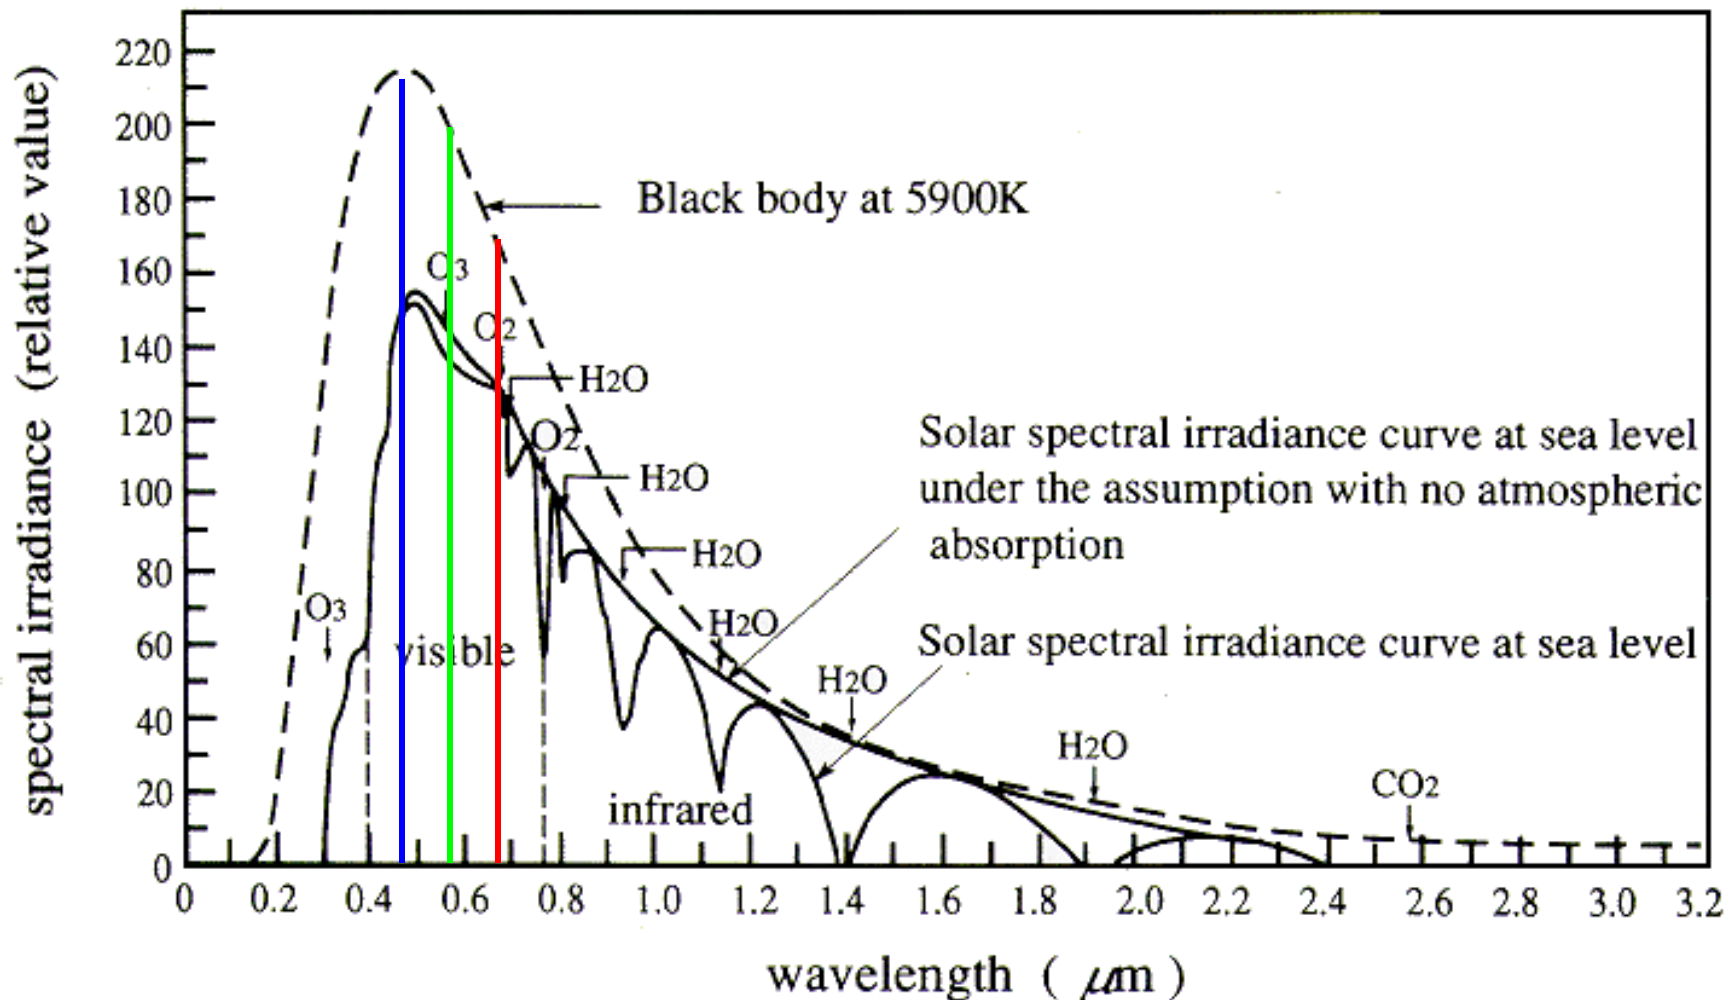


Comparison of spectral irradiance of solar light at sea level with black body radiation

Reflectance

- To properly compare different reflective channels we need to convert observed radiance into a target physical property
- In the visible and near infrared this is done through the ratio of the observed radiance divided by the incoming energy at the top of the atmosphere
- The physical quantity is the Reflectance i.e. the fraction of solar energy reflected by the observed target

Generalized Reflectance Curves for Land-use Classification Applications

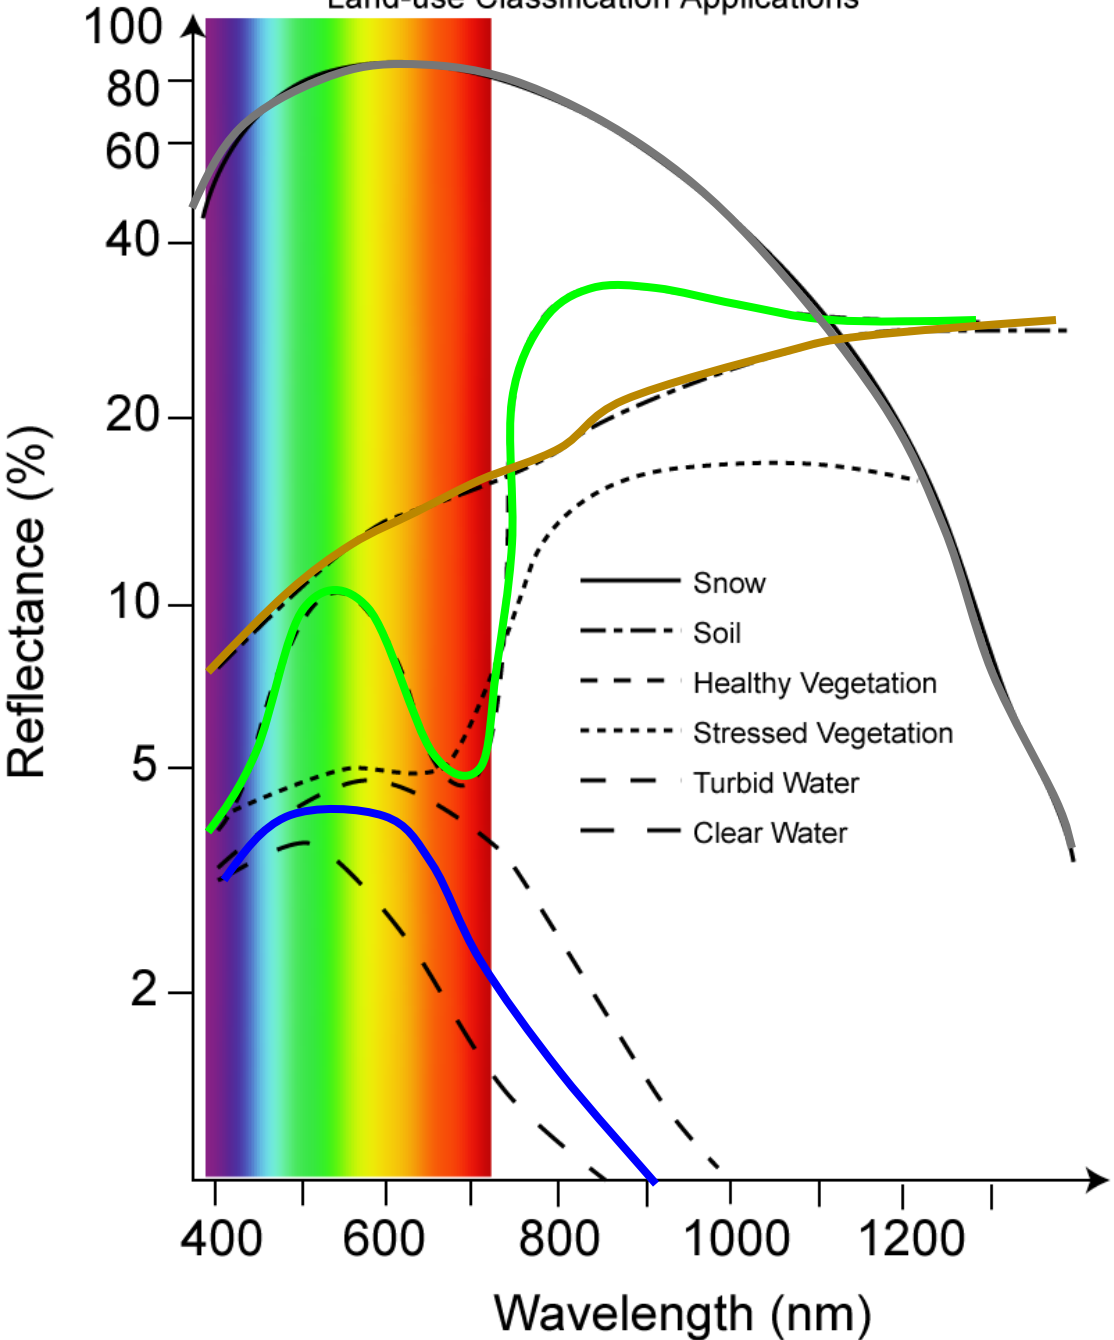


Soil


Vegetation

Snow

Ocean

Reflectances
On Same
Color Scale

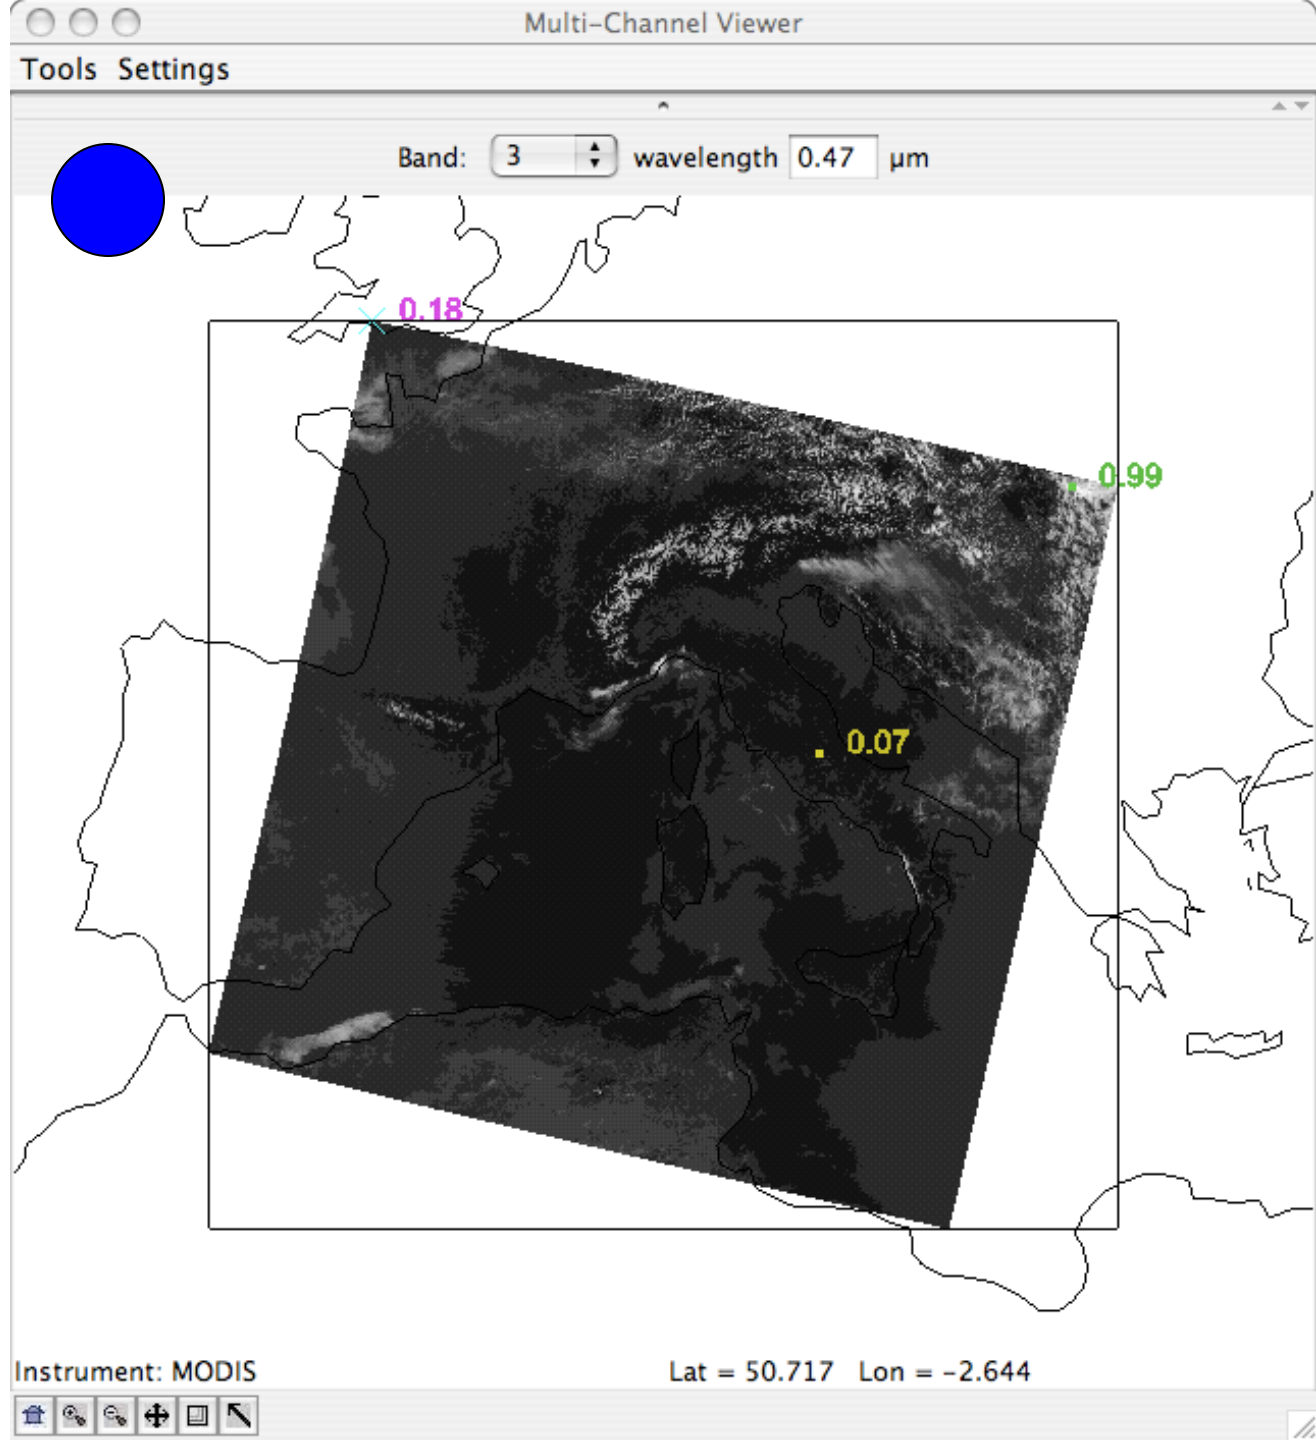

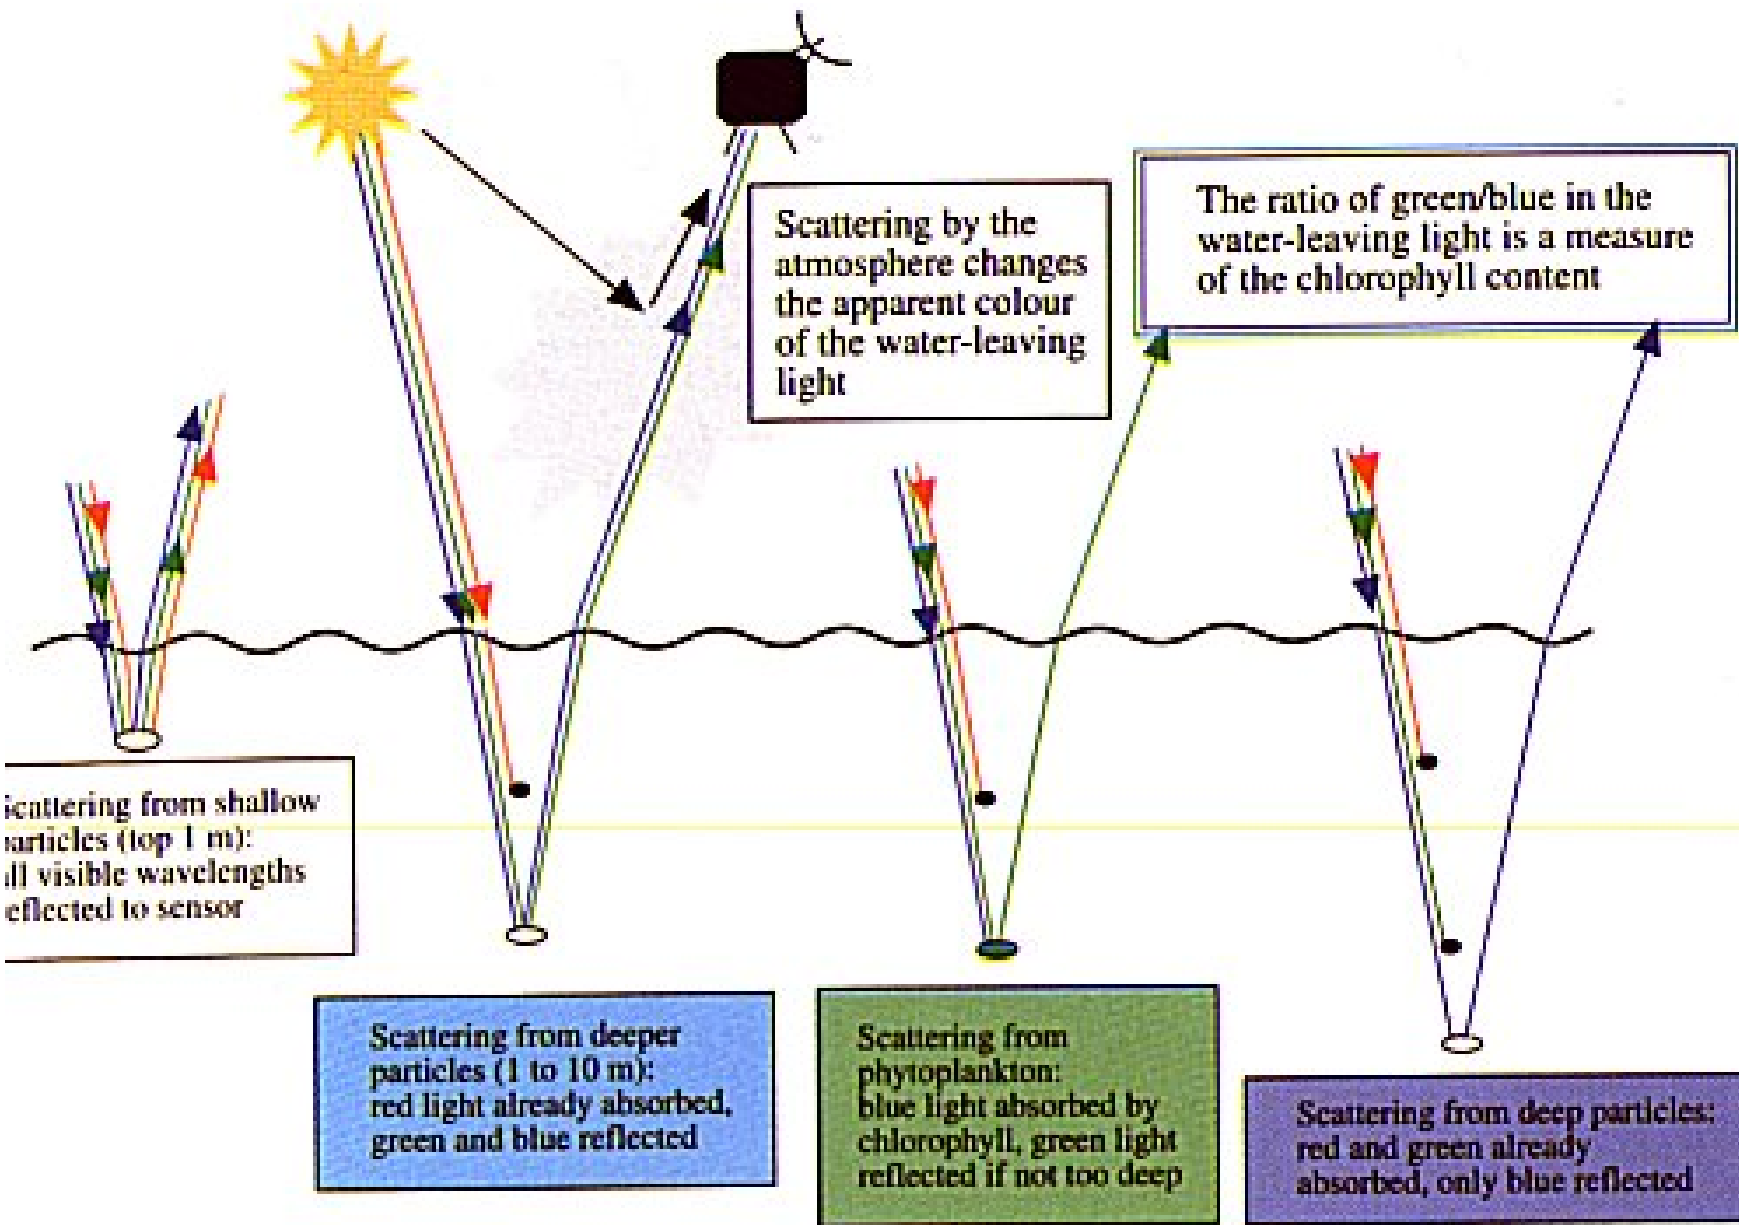

Scattering from shallow particles (top 1 m): all visible wavelengths reflected to sensor

Scattering by the atmosphere changes the apparent colour of the water-leaving light

The ratio of green/blue in the water-leaving light is a measure of the chlorophyll content


Scattering from deeper particles (1 to 10 m): red light already absorbed, green and blue reflected

Scattering from phytoplankton: blue light absorbed by chlorophyll, green light reflected if not too deep

Scattering from deep particles: red and green already absorbed, only blue reflected


Radiance observed
In the Blue Band
At $0.41 \mu\text{m}$

More than 75% of the
Observed energy
Over Ocean
In the blue bands
Is due to atmospheric
Scattering.
Less than 25% is due
to Water
Leaving Energy

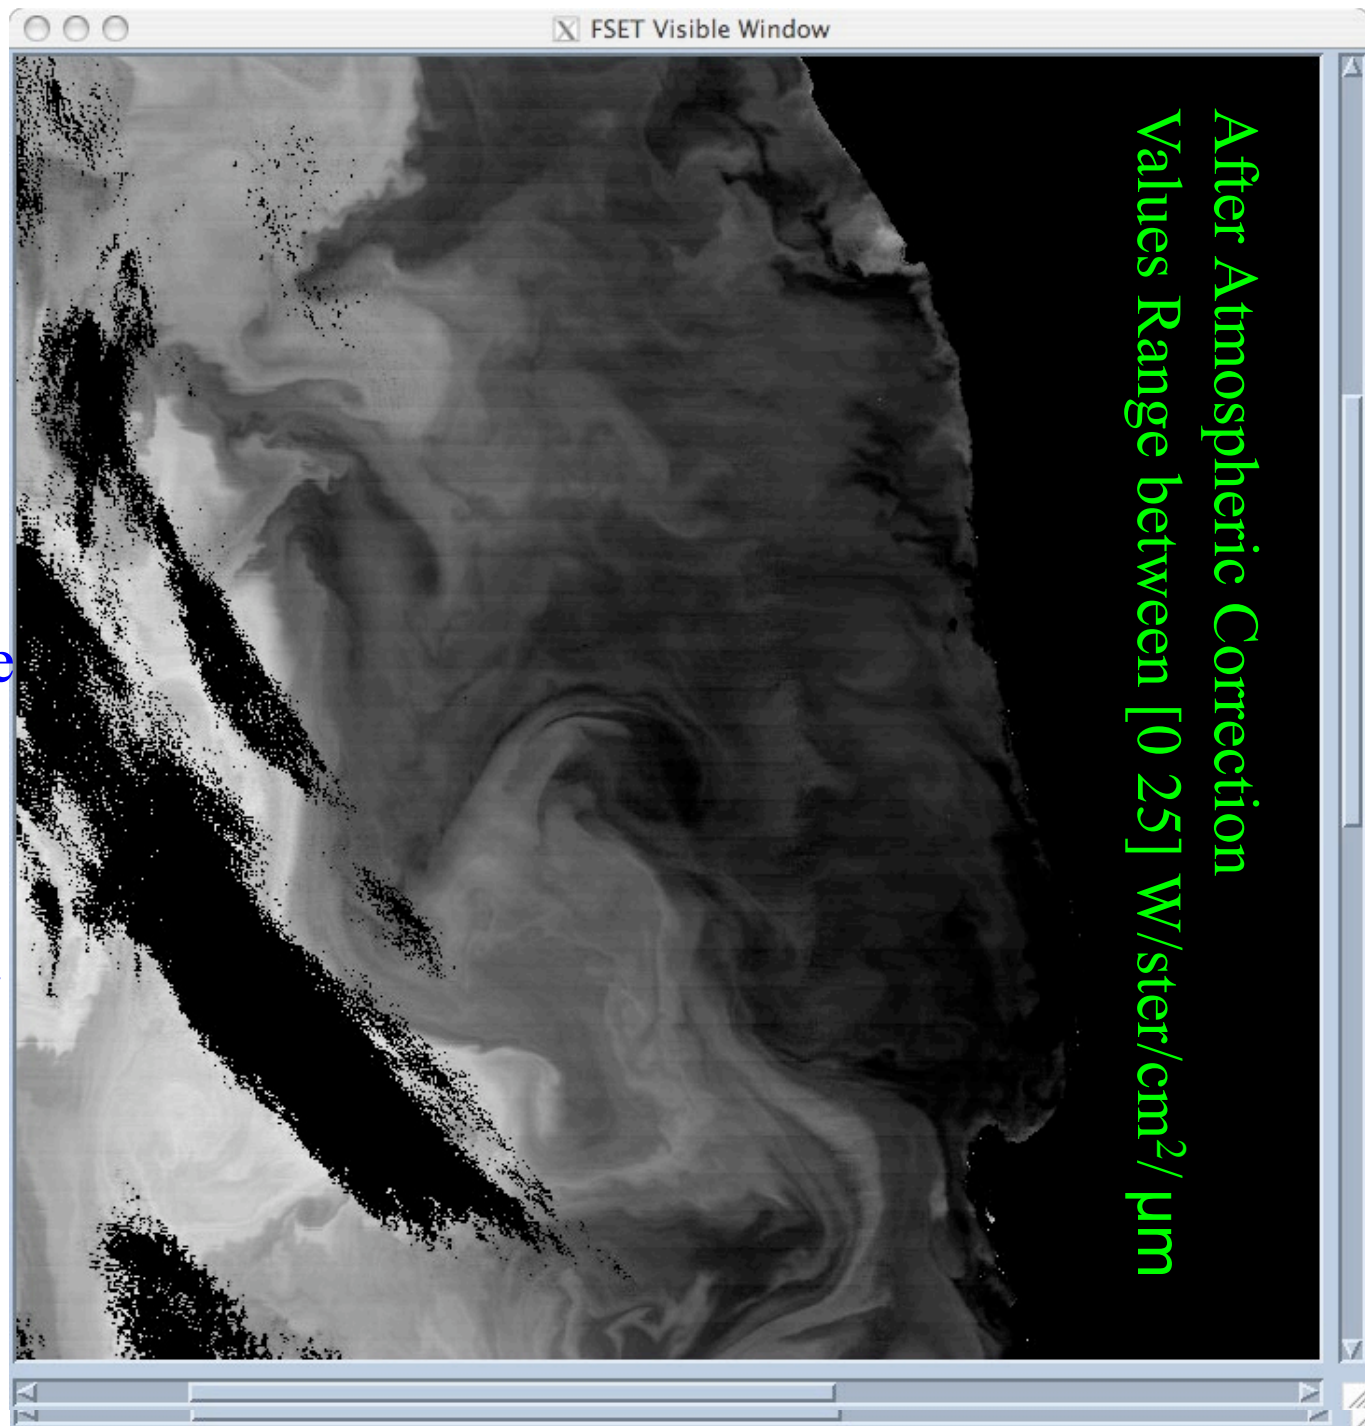



Transects of Reflectance

Band 4
(0.56 Micron)

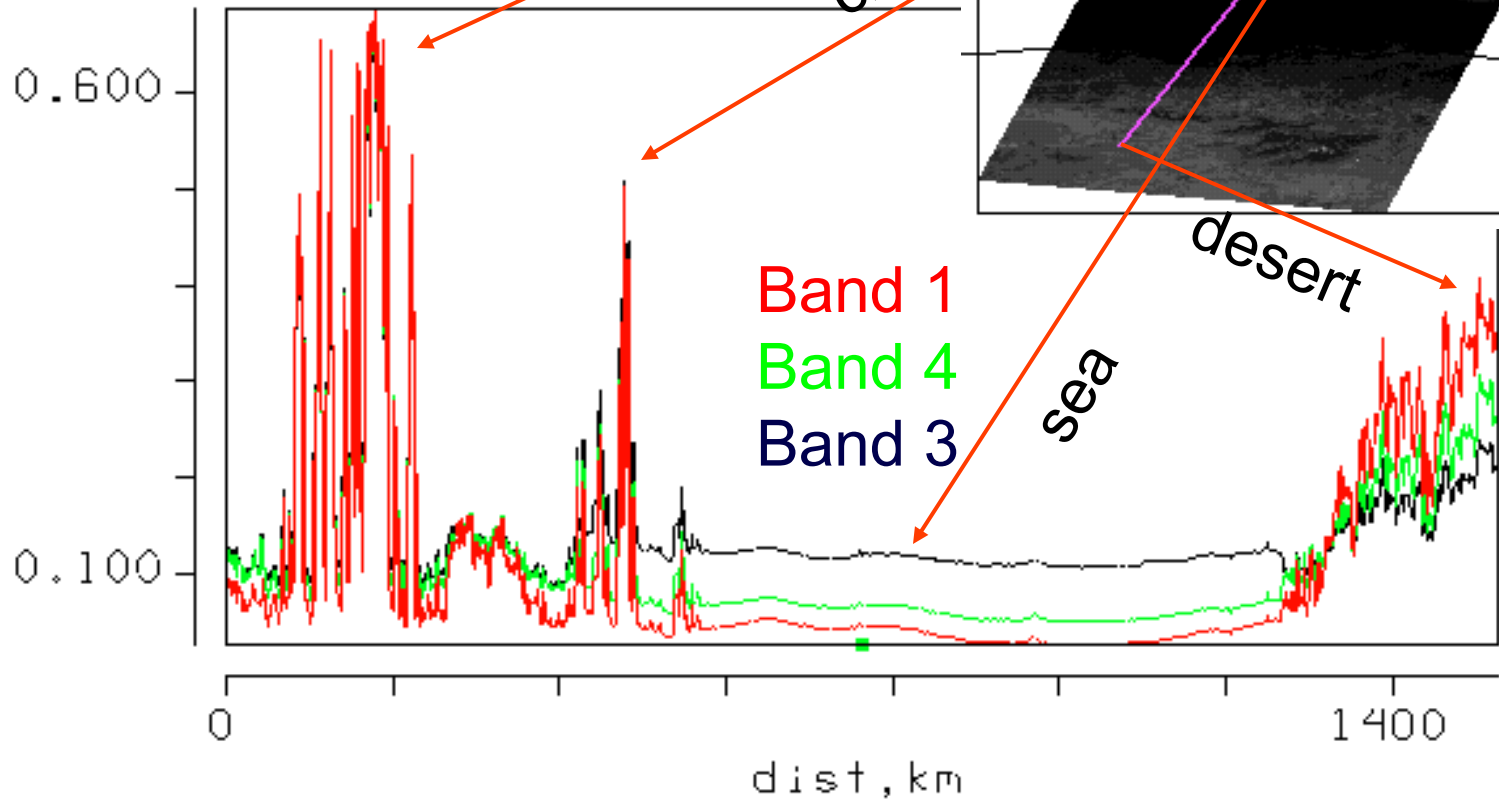

Electromagnetic Spectrum

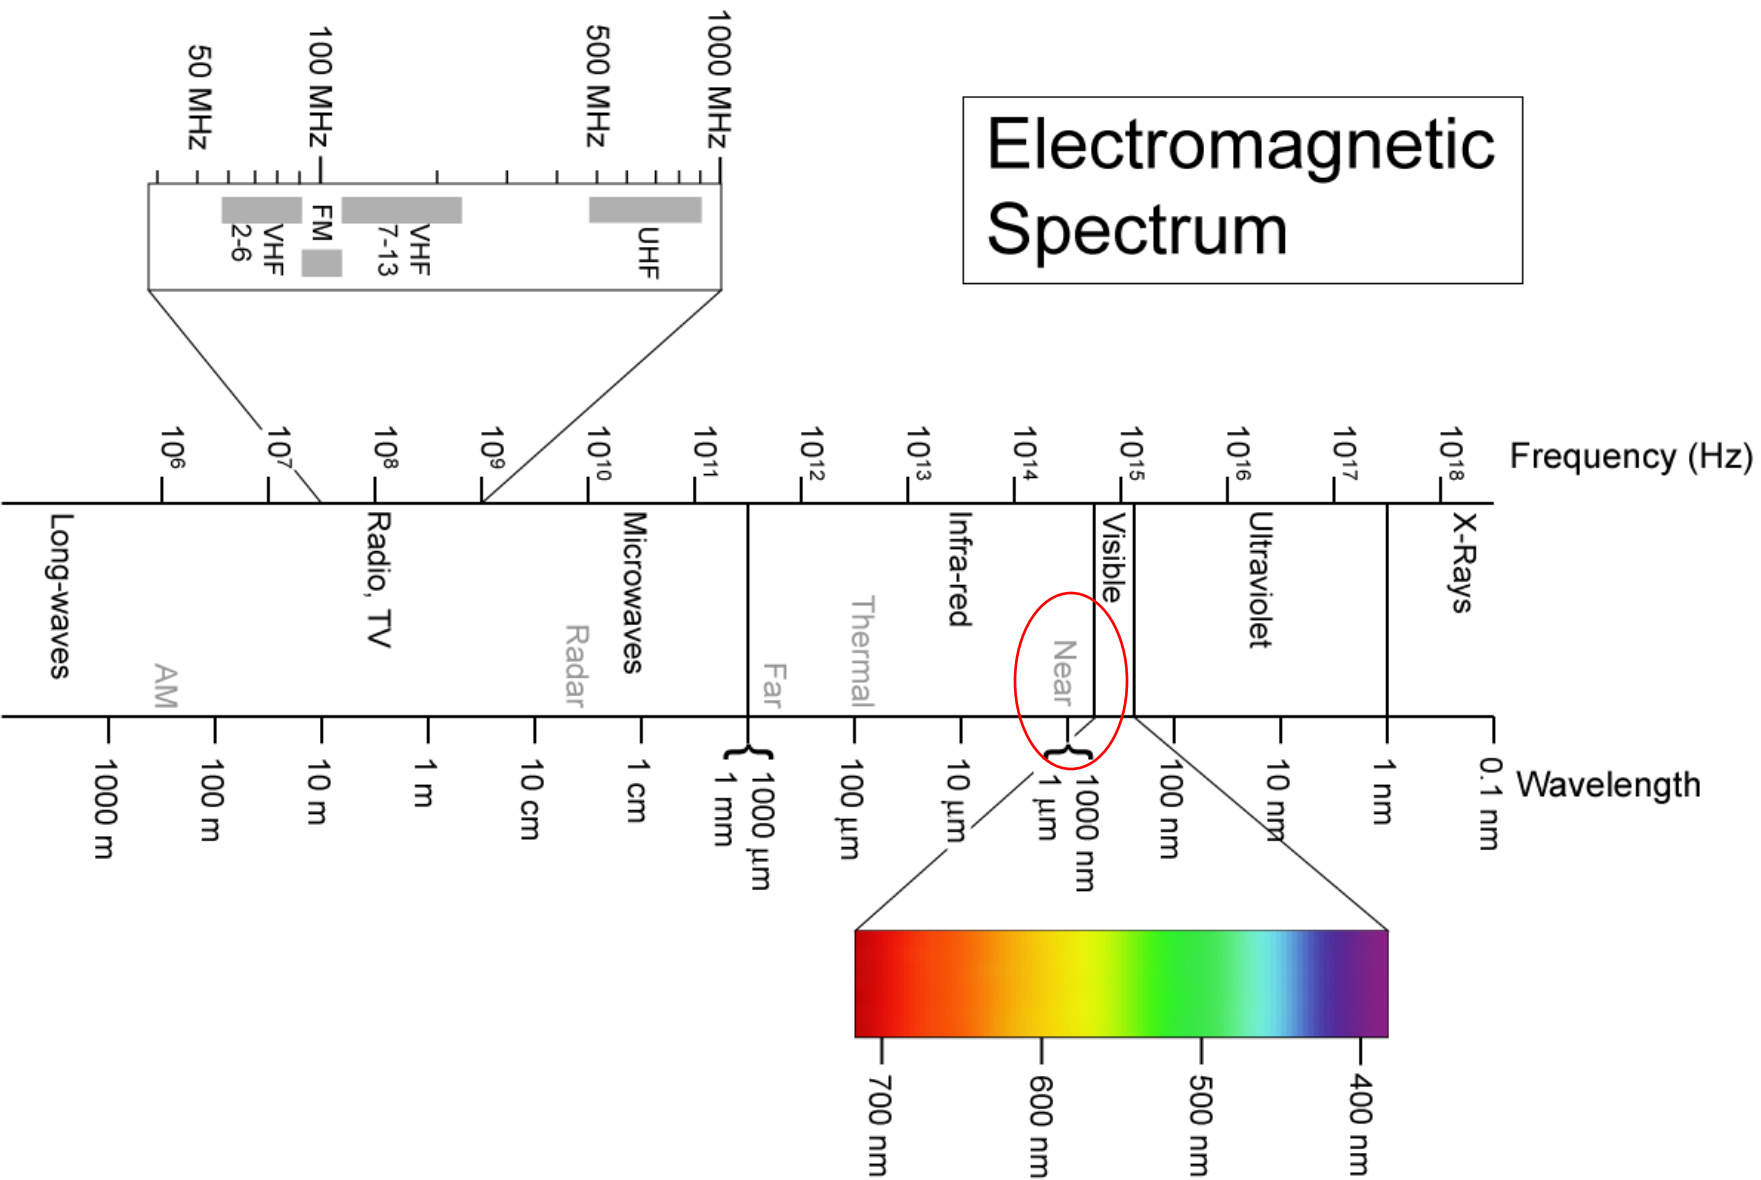


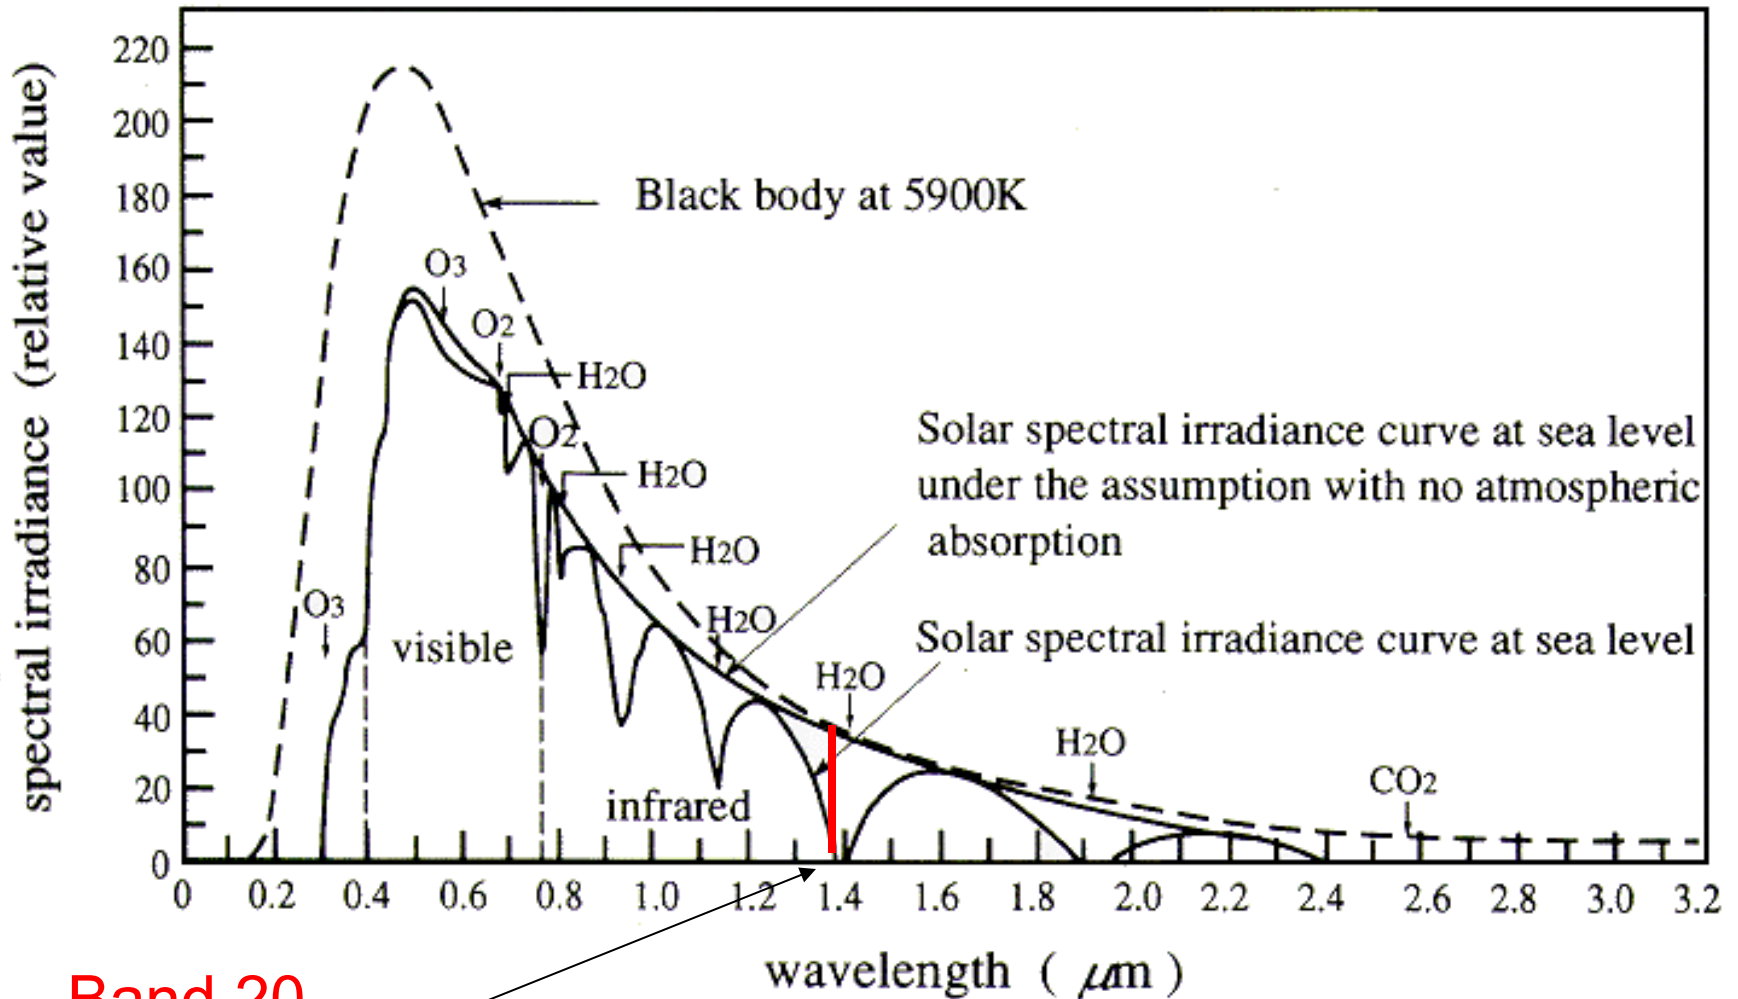

Band 20
1.38 micron
Strong H₂O


Comparison of spectral irradiance of solar light at sea level with black body radiation

Only High Clouds
Are Visible

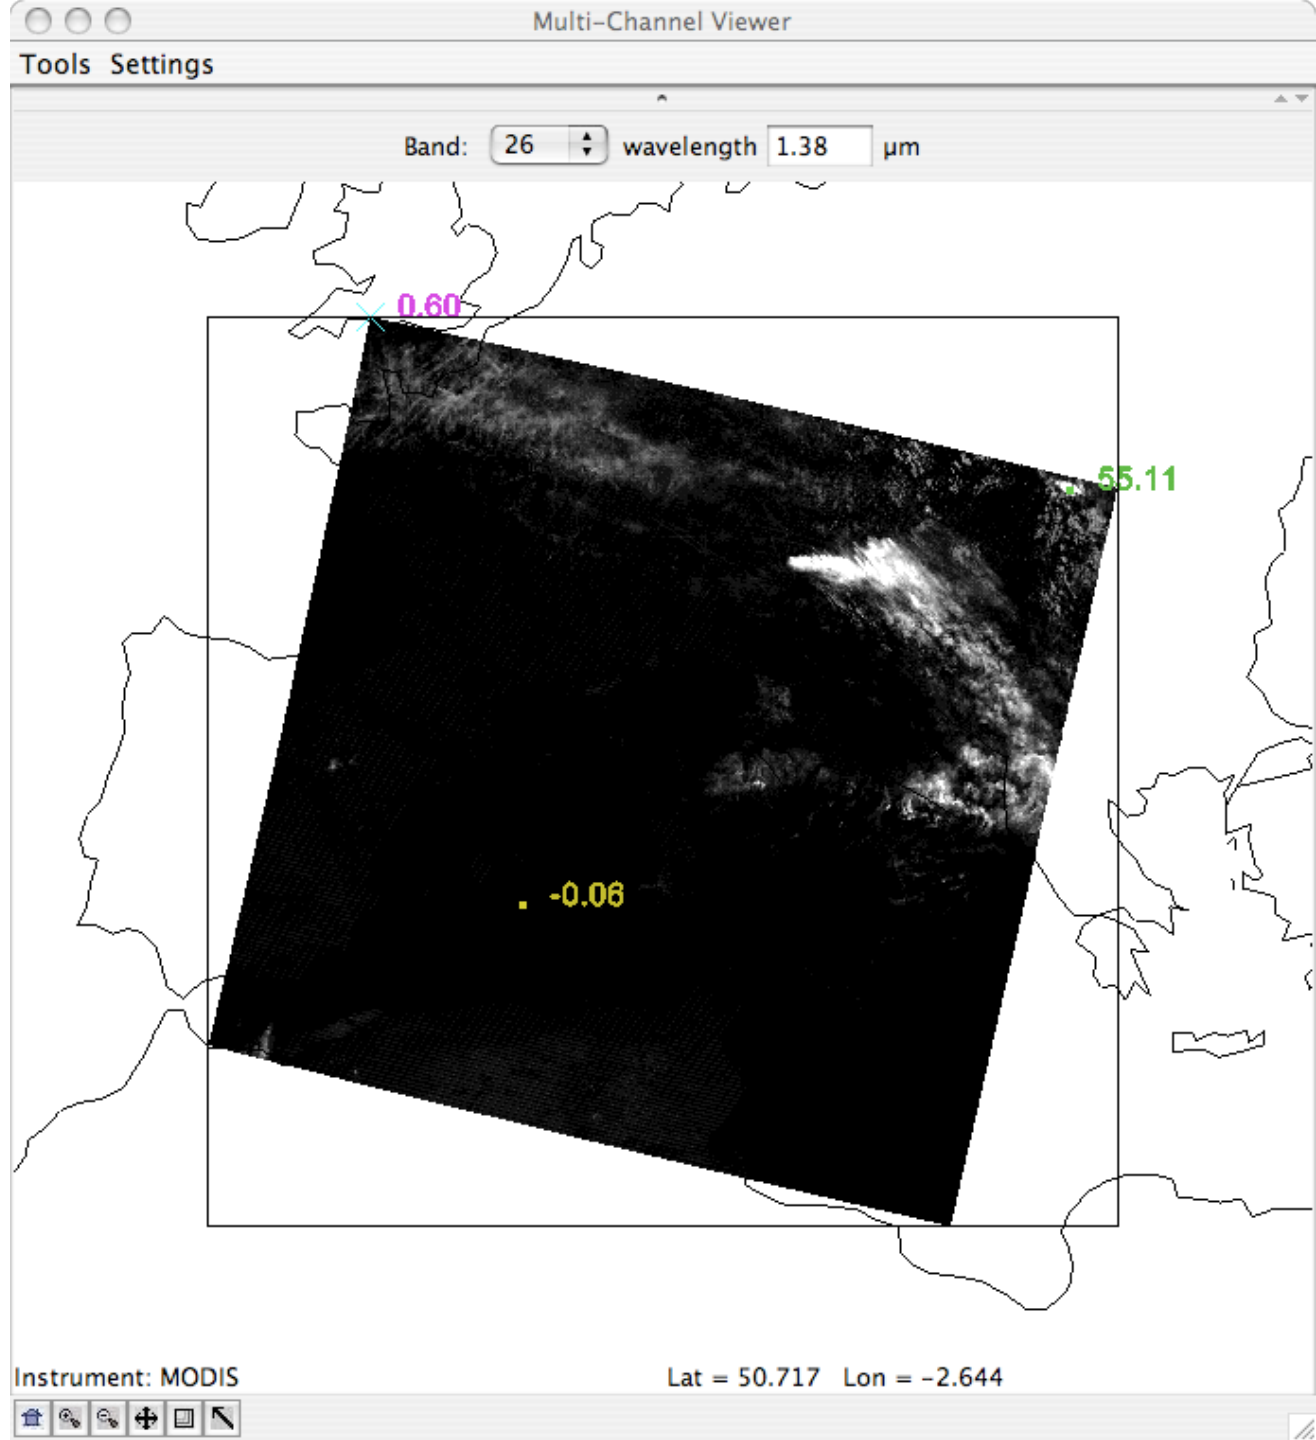


SOLAR SHORT WAVELENGTH

Band 20
1.38 micron

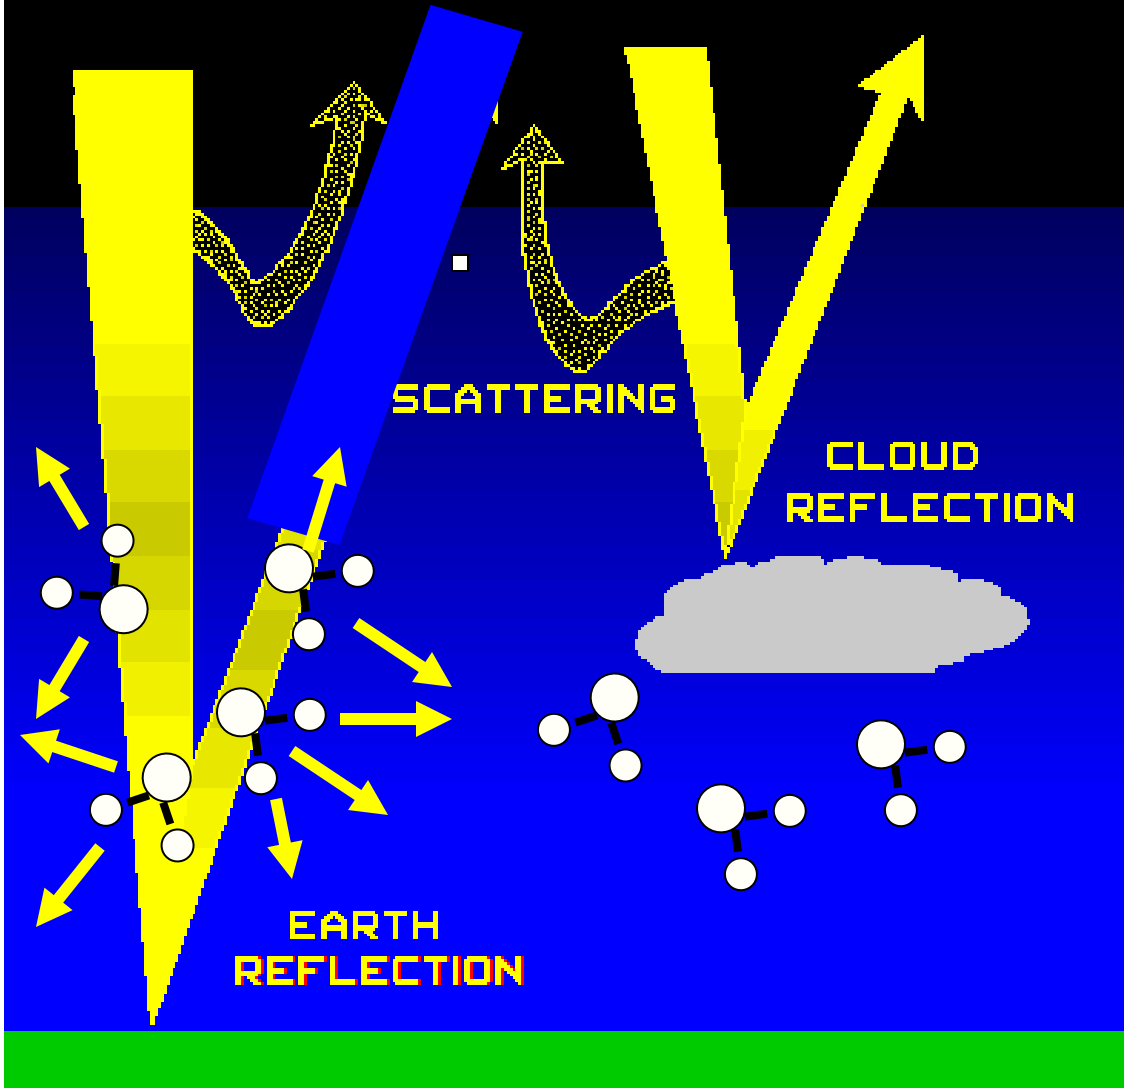

Infrared (Emissive Bands)

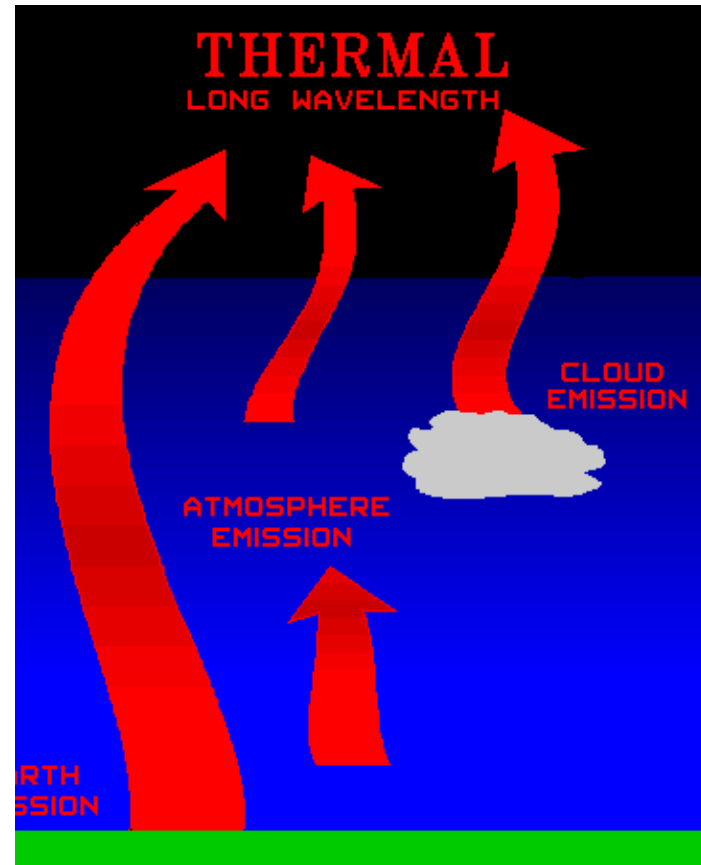


Emissive Bands

Used to observe terrestrial energy emitted by the Earth system in the IR between 4 and 15 μm

- About 99% of the energy observed in this range is emitted by the Earth
- Only 1% is observed below 4 μm
- At 4 μm the solar reflected energy can significantly affect the observations of the Earth emitted energy

Spectral Characteristics of Energy Sources and Sensing Systems

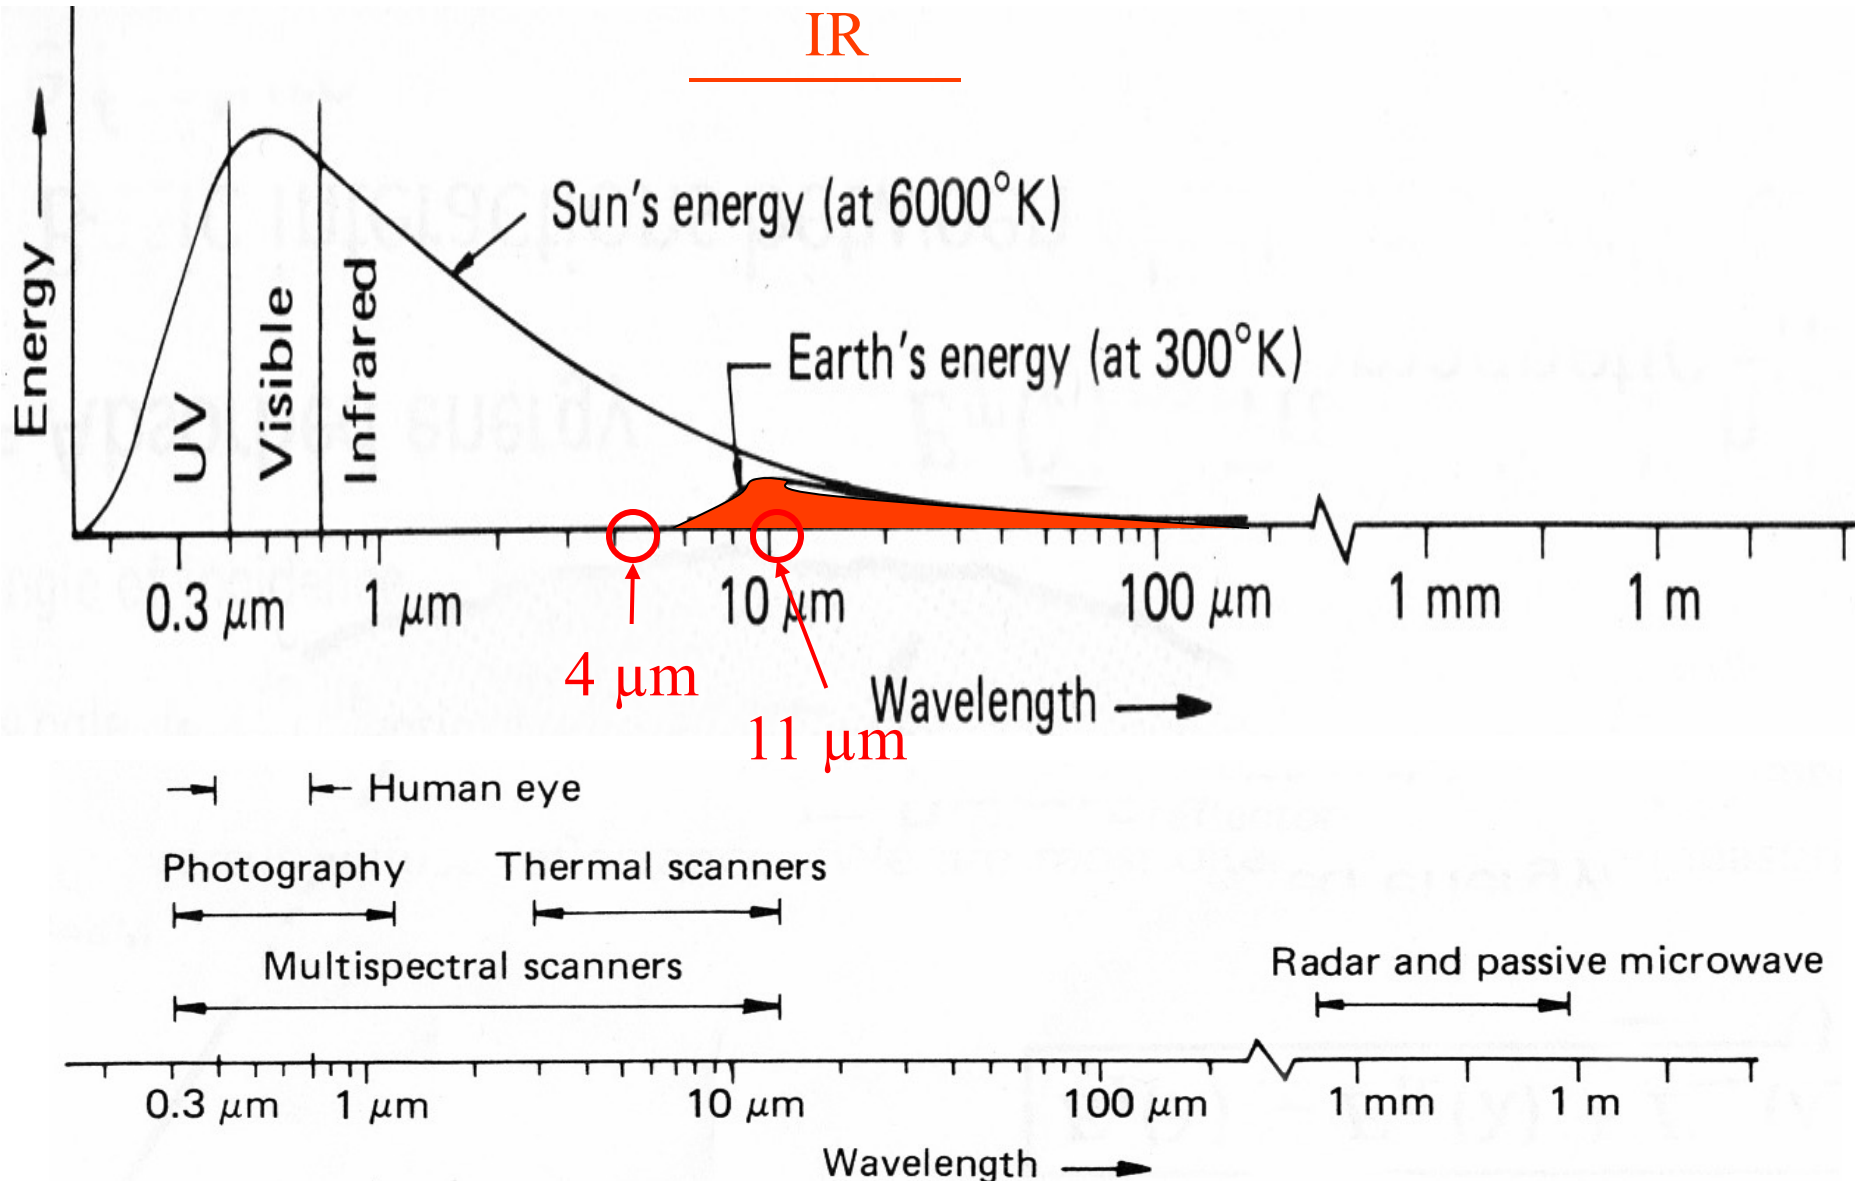

Observed Radiance at 4 micron


Window Channel:

- little atmospheric absorption
- surface features clearly visible

Range [0.2 1.7]

Values over land
Larger than over water

Reflected Solar everywhere
Stronger over Sun glint

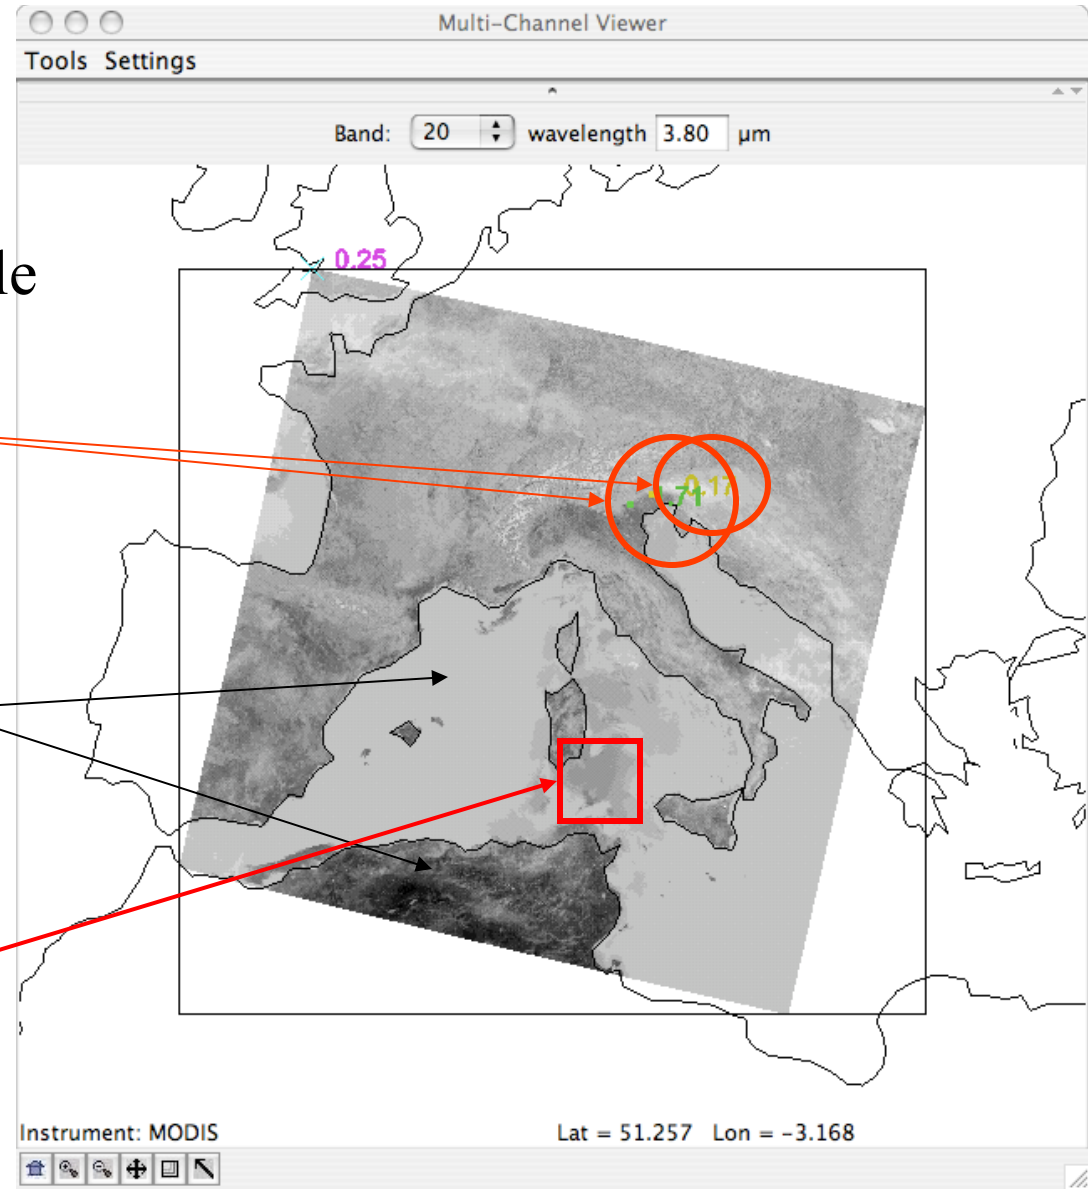

Observed Radiance at 11 micron


Window Channel:

- little atmospheric absorption
- surface features clearly visible

Range [2 13]

Values over land
Larger than over water

Undetectable Reflected Solar
Even over Sunlint

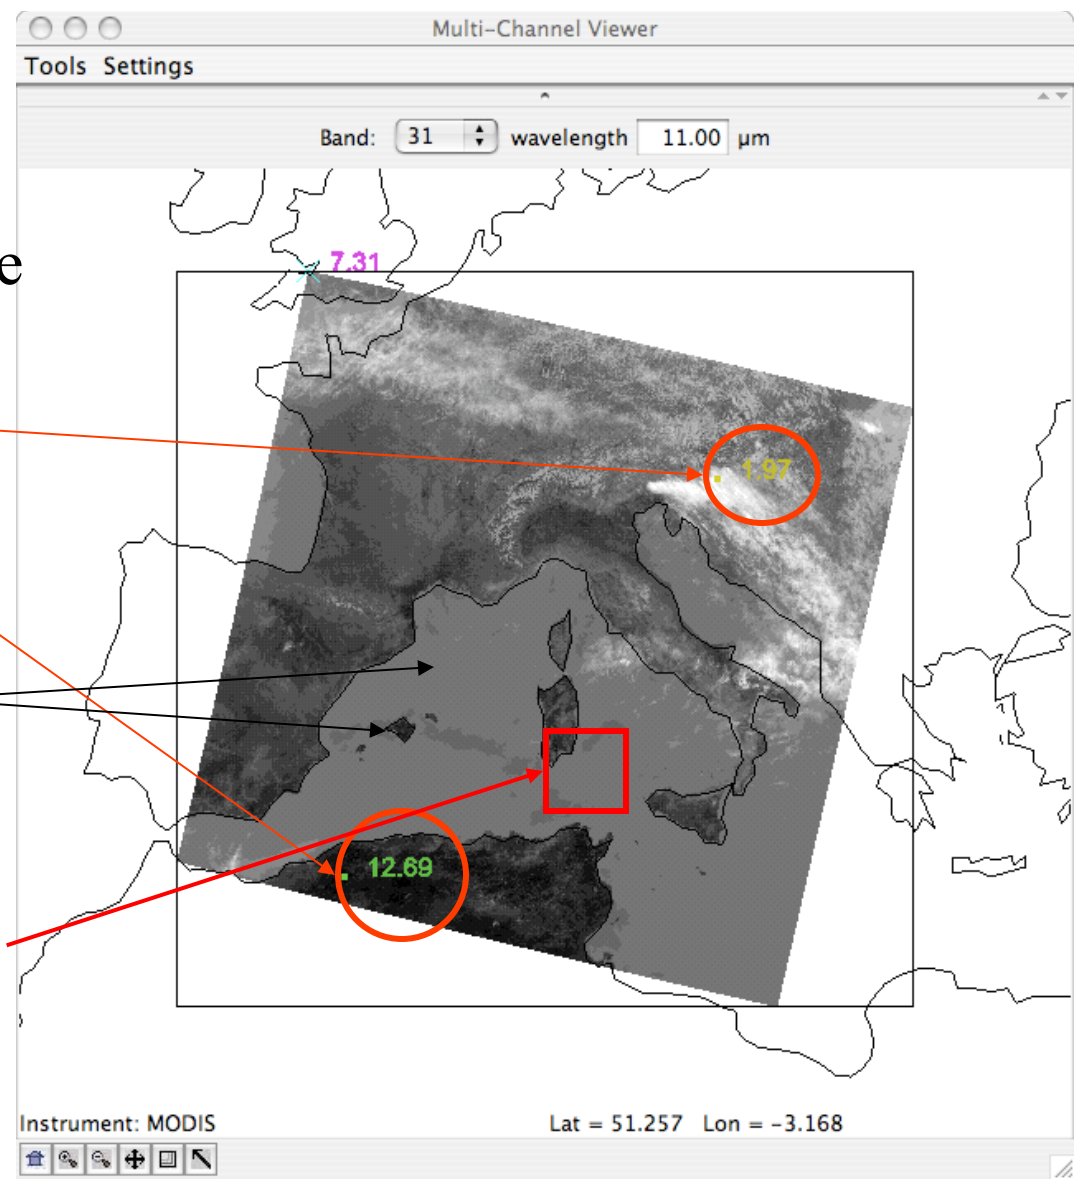

Brightness Temperature

- To properly compare different emissive channels we need to convert observed radiance into a target physical property
- In the Infrared this is done through the Planck function
- The physical quantity is the Brightness Temperature i.e. the Temperature of a black body emitting the observed radiance

Observed BT at 4 micron

Window Channel:

- little atmospheric absorption
- surface features clearly visible


Range [250 335]

Clouds are cold

Values over land

Larger than over water

Reflected Solar everywhere
Stronger over Sun glint

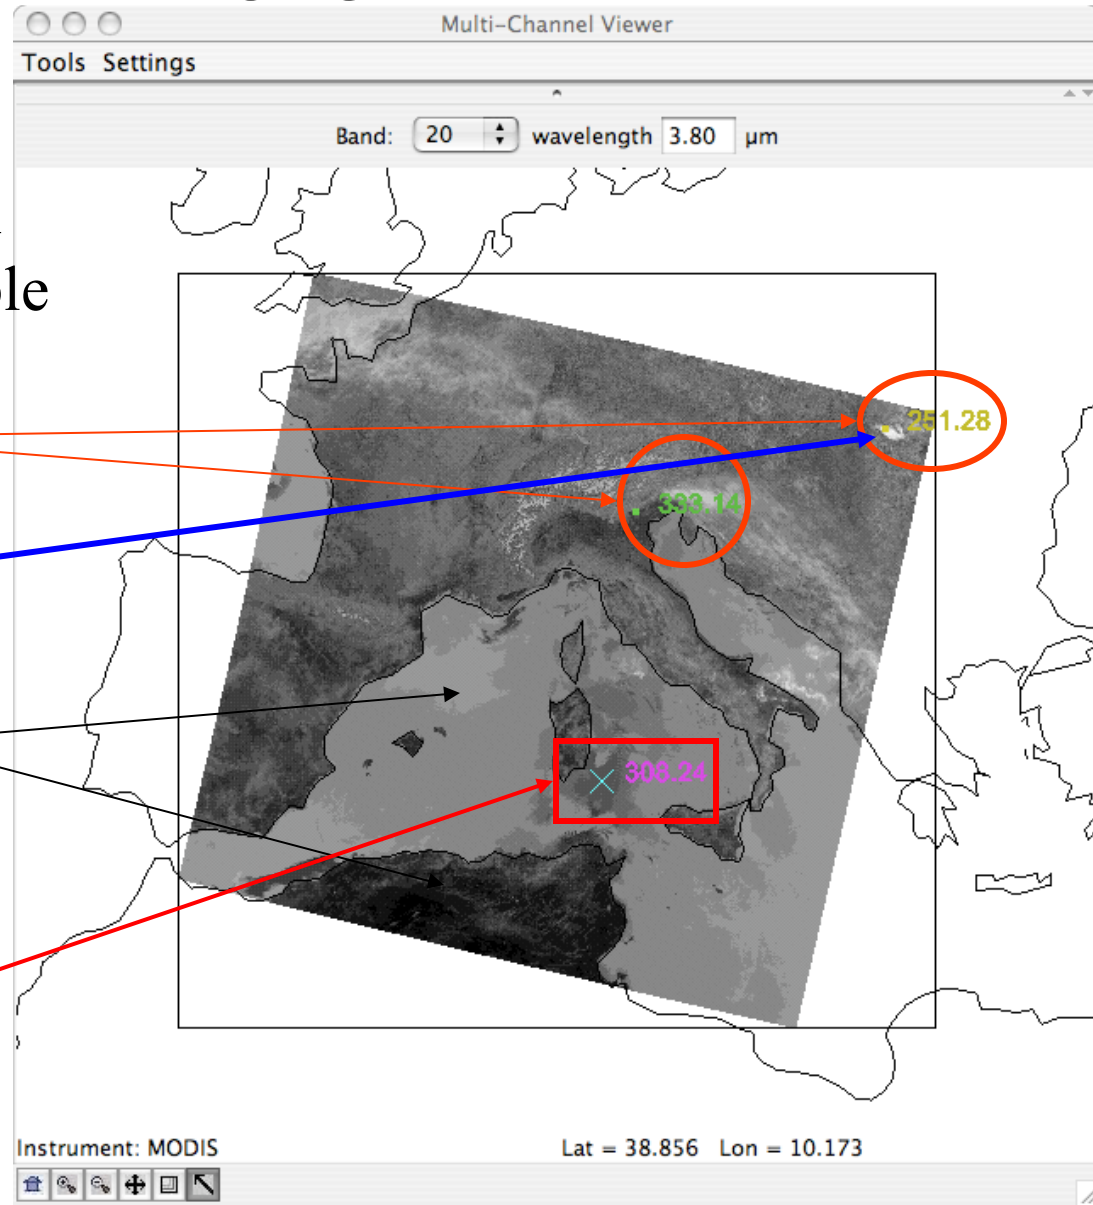

Observed BT at 11 micron

Window Channel:

- little atmospheric absorption
- surface features clearly visible


Range [220 320]

Clouds are cold

Values over land

Larger than over water

Undetectable Reflected Solar
Even over Sunlint

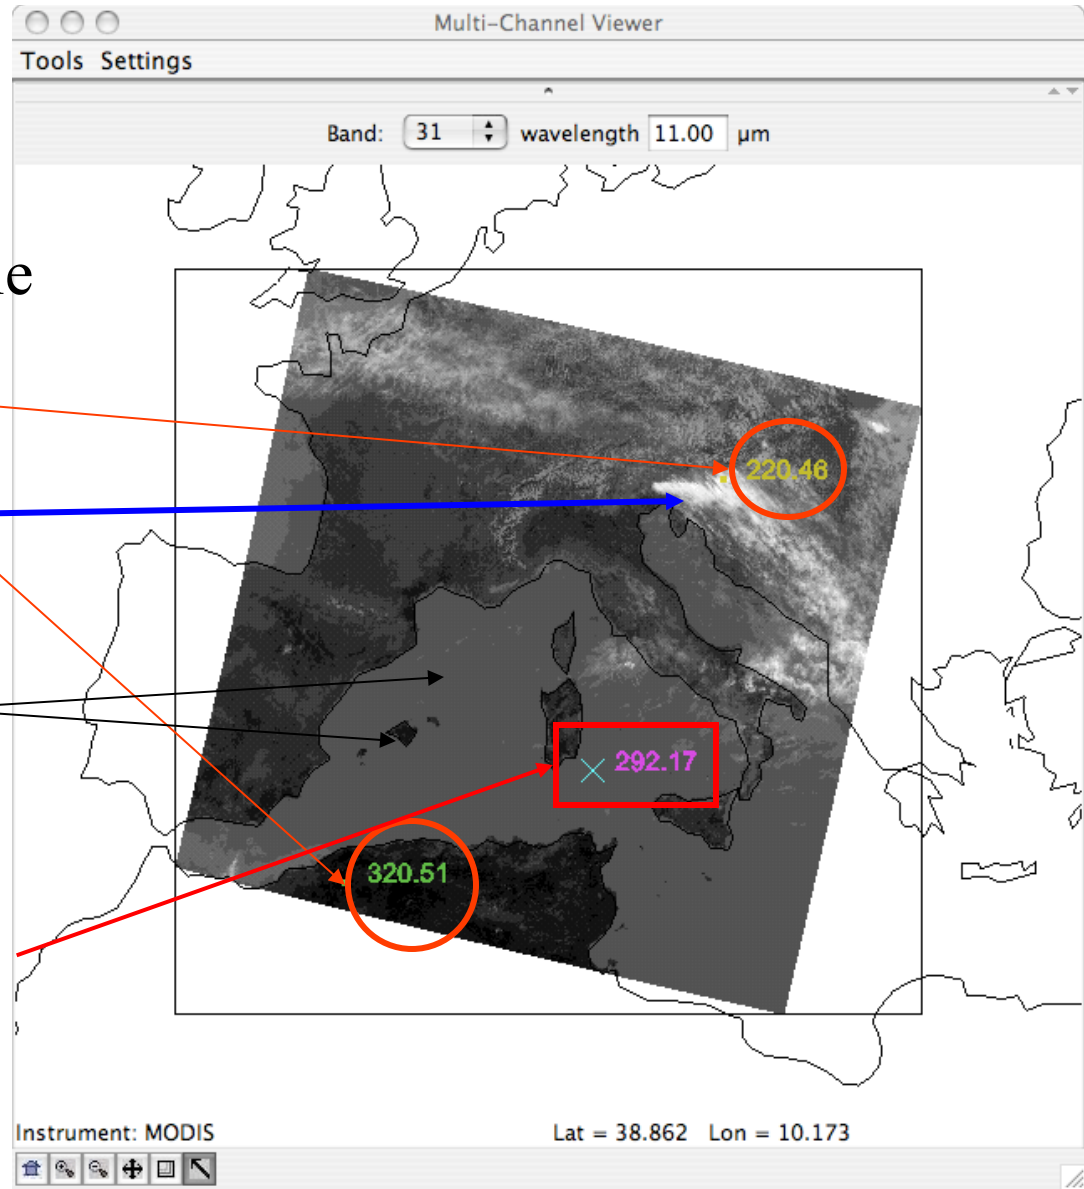

Conclusions

- **Radiance** is the **Energy Flux** (emitted and/or reflected by the Earth) which strikes the **Detector Area** at a given **Spectral Wavelength** (wavenumber) over a **Solid Angle** on the Earth;
- **Reflectance** is the fraction of solar energy reflected to space by the target;
- Given an observed radiance, the **Brightness Temperature** is the temperature, in Kelvin, of a blackbody that emits the observed radiance;
- Knowing the spectral reflective (Vis) and emissive (IR) properties (**spectral signatures**) of different targets it is possible to detect: clouds, cloud properties, vegetation, fires, ice and snow, ocean color, land and ocean surface temperature